

CIRCUIT DRAWN WITH
POWER SUPPLY OFF

FOR TYPICAL REMOTE CONTROL
DETAILS SEE DOCUMENT
RWS303

TRANSFORMER TAPPING OPTIONS

TYPE 1 TYPE 2

TAP	NOM	RANGE	TAP	NOM	RANGE
X	100	80-120	X	200	160-240
Y	110	88-132	Y	230	184-276
Z	120	96-144	Z	270	216-324
FS1-250mA A/S FS2-5A A/S			FS1-150mA A/S FS2-2.5A A/S		

TYPE 3 TYPE 4

TAP	NOM	RANGE	TAP	NOM	RANGE
X	380	304-456	X	480	384-576
Y	400	320-480	Y	575	460-690
Z	415	332-498	Z	690	552-828
FS1-100mA A/S FS2-1.5A A/S			FS1-50mA A/S FS2-1.6A F/A		

ALL TRANSFORMER TYPES -
FUSE FS3 - 20A ATO FAST ACTING
PS1 SELF RESETTING FUSE

FAILSAFE OPERATION - ON LOSS OF 3-PHASE,
CUSTOMER SUPPLY ON 4 & 5 IS ALSO LOST.
THE LOSS OF CUSTOMER SUPPLY MUST BE
USED AS THE FAILSAFE TRIGGER
TERMINAL 15 MUST ONLY BE USED WHEN AN
INTERNAL FAILSAFE BATTERY PACK IS FITTED
THE 24VDC EXTERNAL SUPPLY FOR FAILSAFE
OPERATION MUST BE APPLIED TO TERMINALS
21 & 14.

REMOTE INPUTS MUST ALSO USE THIS SUPPLY
ACTUATOR ESD ACTION(A1) DEFAULT STAY PUT
ESD CONTACT(A2) DEFAULT N/O MAKE FOR ESD

NOTE



REFER TO PUBLICATION E175E FOR
APPROVED FUSES FS1, FS2 AND FS3.

MAX EXTERNAL LOAD ON TERMINALS
4 & 5 TO BE 9VA.

CONTROL SIGNAL THRESHOLD VOLTAGES
TO BE MINIMUM 'ON' 20V AC/DC
MAXIMUM 'OFF' = 3V
MINIMUM CONTROL SIGNAL DURATION
TO BE 300MS.

CURRENT DRAWN FROM EACH REMOTE
CONTROL SIGNAL IS 5mA ON 24V DC

WIRES ARE IDENTIFIED AT EACH END
BY TERMINAL No. OR TAG No.

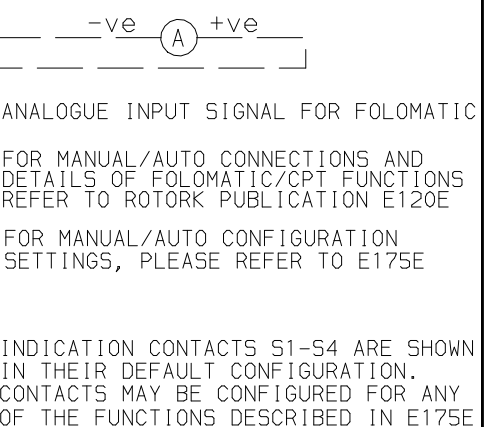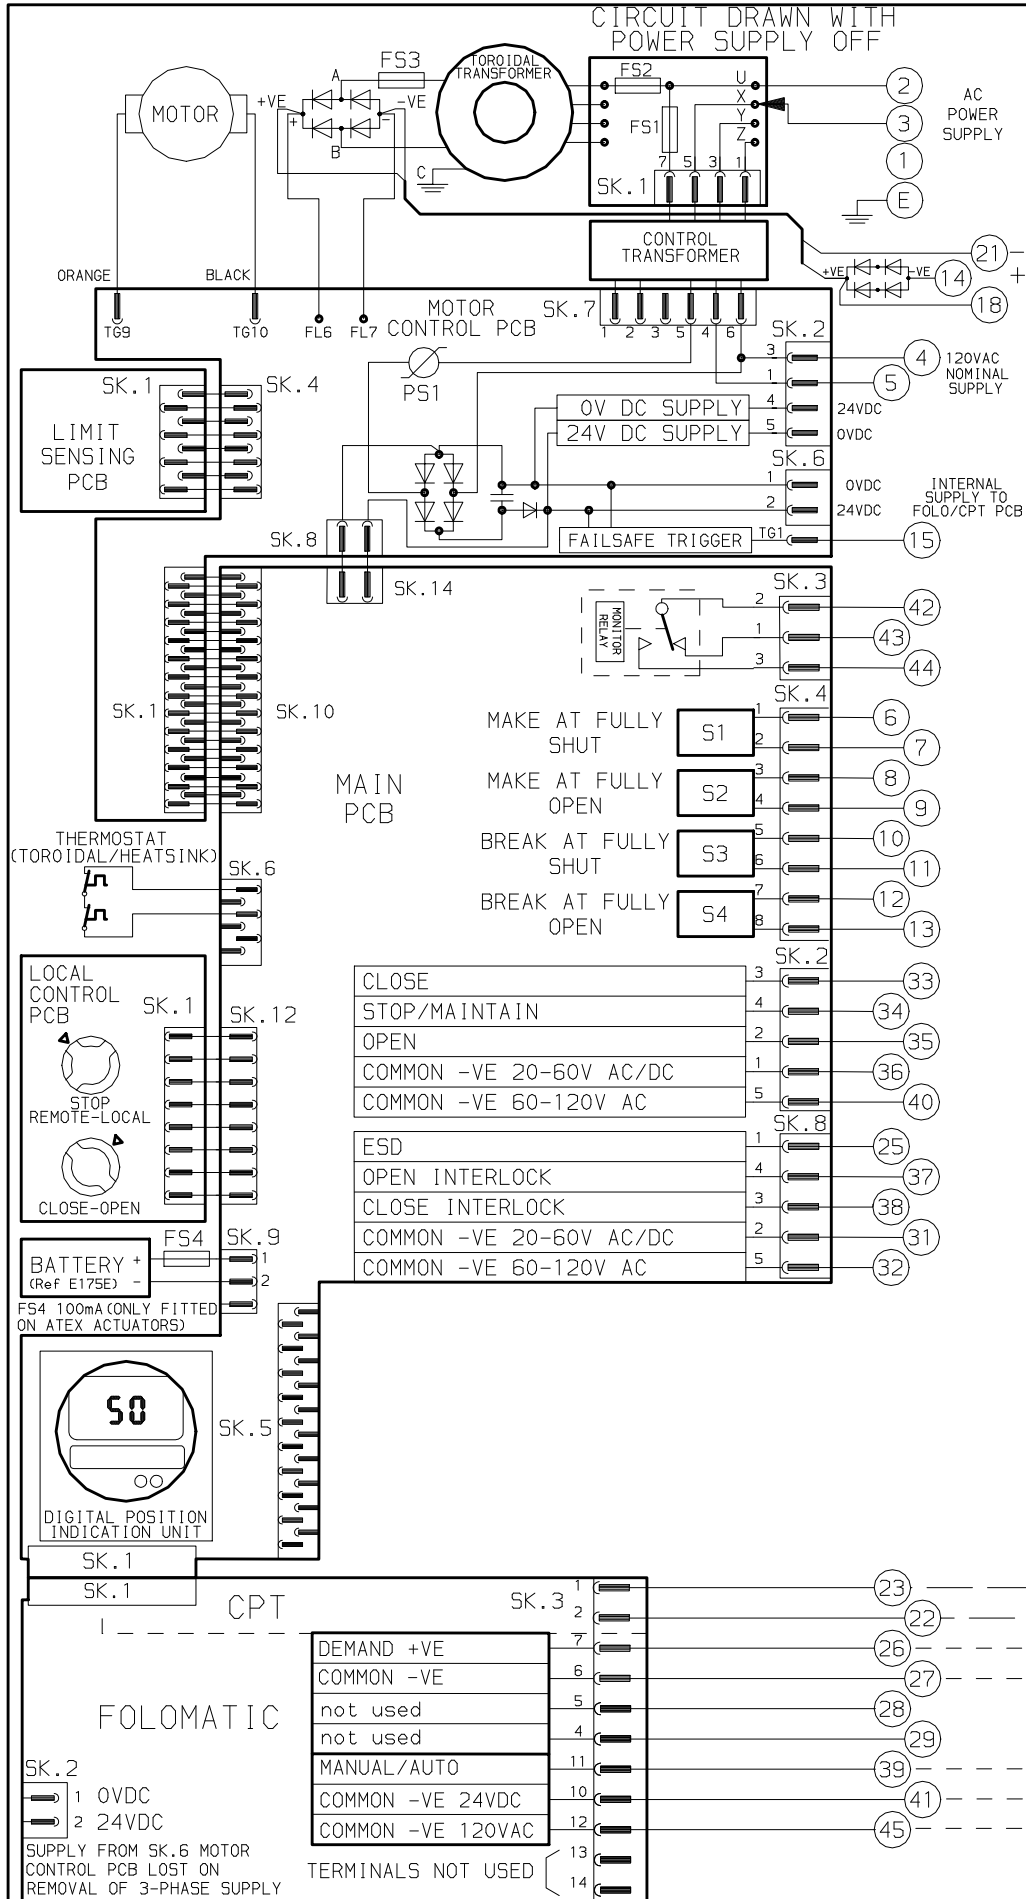

No	DATE	REVISION DETAILS
01		

www.rotork.com

ROTORK CONTROLS LTD
BATH, BA1 3JQ
ENGLAND
Tel: 01225-733200

ROTORK CONTROLS INC
ROCHESTER
NY 14624, USA
Tel: 585-247-2304

CONFIG BY PJW
DATE 210611
CHECKED JC1
BASE WD 6018-101
JOB No -
M.I.No -

**IQT+FOLO+CPT+EX F/SAFE
& 120VAC ON 4 & 5.**

CIRCUIT DIAGRAM No -REV 101
6018-101-01

B1 C1 B2 C2