


Max. STEM height
diameter dependdable
48.5 [1.91]

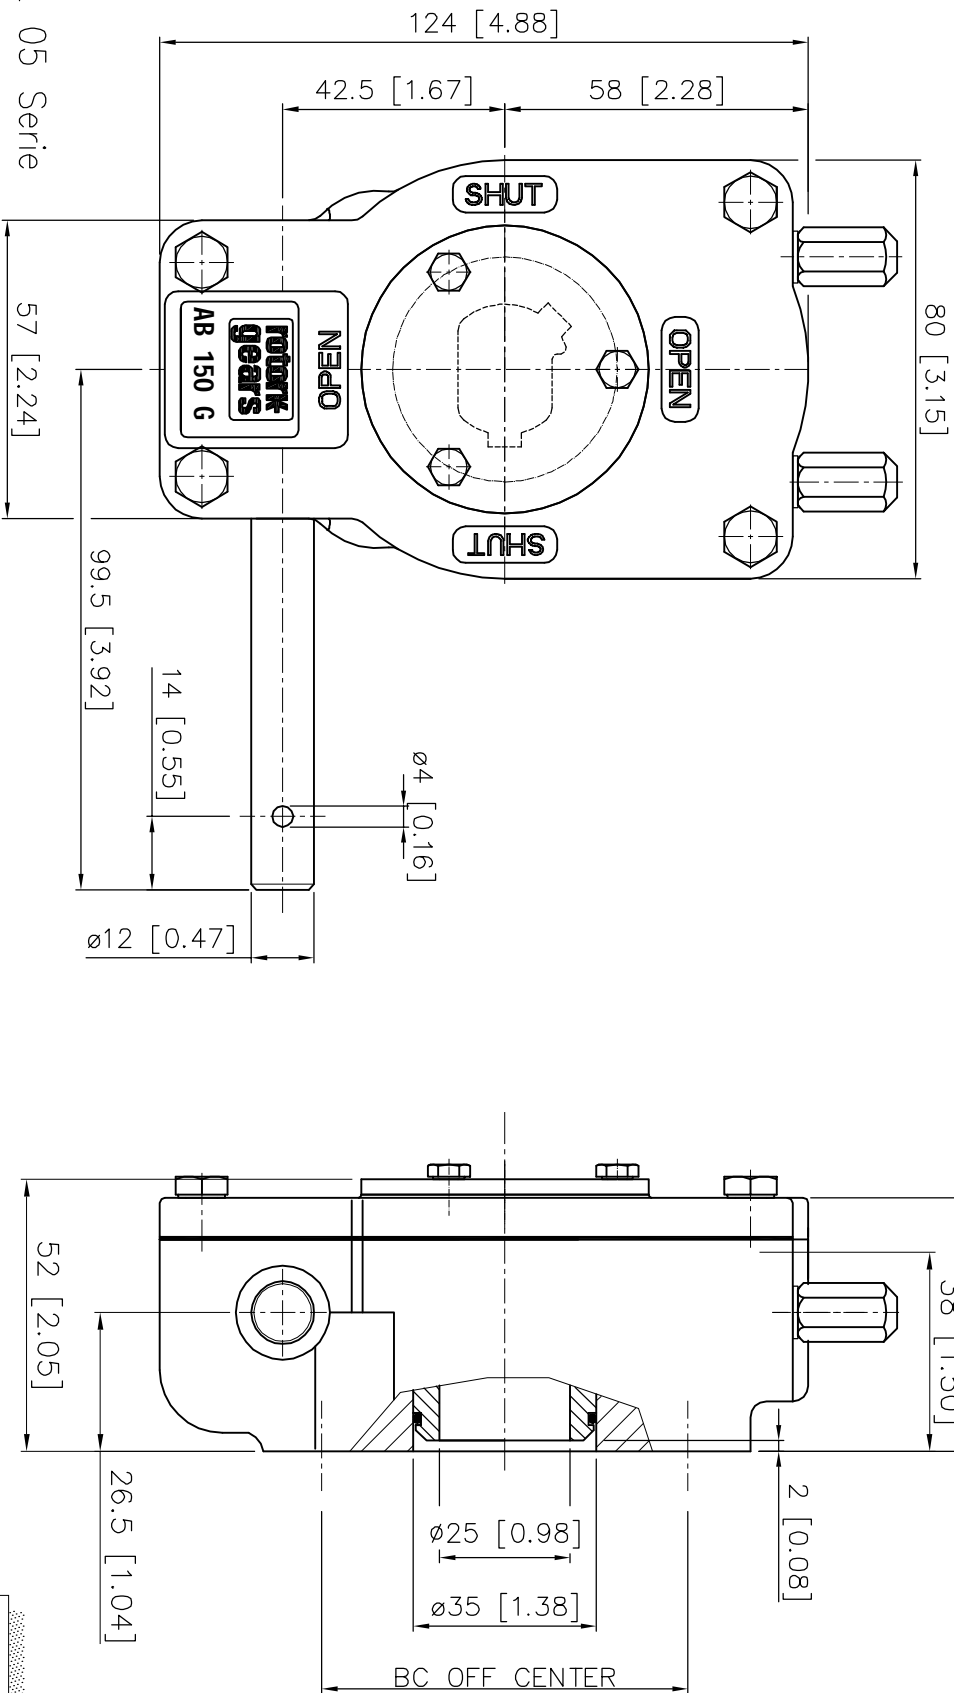

Suitable for insert 05 Serie

DESCRIPTION


TRAVEL : -5° to 95° adjustable
RATIO : 40 : 1
TURNS TO CLOSE : 10
WEIGHT : 2.2 kg. (4.8 Lb) excl.handwheel

MOUNTINGHOLES

BOLT CIRCLE : min. $\phi 42$ [1.65]
(OFF CENTER) : max. $\phi 70$ [2.75]
acc. ISO 5211 : F04 - F05 - F07
BORE : min. $\phi 8.4(0.33)$ max. $\phi 15(0.59)$ #14(0.55)

TORQUE

max.OUTPUT : 150 Nm (1328 lbf.in.)
max.INPUT : 16 Nm (138 lbf.in.)
M.A. : 9.6 ±15%




Dimensions in MM [inch]

rotork gears

Nijenhelderstraat 25
7581 PV Loosdrecht
The Netherlands

GEARBOX AB 150 G BU LH

THIS DOCUMENT IS PROPERTY OF ROTORK GEARS. NEITHER THIS OR ITS CONTENT MAY BE COPIED OR USED IN ANY OTHER WAY WITHOUT THE WRITTEN CONSENT OF ROTORK GEARS. ABOVE PRINTED ON THIS DOCUMENT SHALL CONSTITUTE A SIGNIFICATION OF THE FOREGOING CONDITIONS



Drawn : N.M

Date : 20-06-06

Dwg Nr.: D01G1-002

Rev.: 02