

## DESCRIPTION

Material Wheel: GG25
Material Chain: Steel Zinc-plated or S.S.
Chain is acc. Din 766

rown gears Nijverheidstraat 25 7581 PV Losser The Netherlands

Guide is included.

147.5 [5.81]


167.5 [6.59]

217.5 [8.56]


306 [12.05]


185 [7.28]

WHEEL 135 135 [5.31] 120 [4.72]

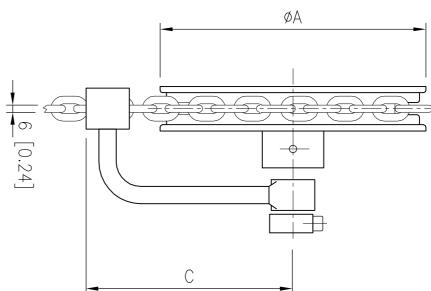

Ф





- \* The maximum advised RIM pull is 700N
- \* Dimensions in MM [inch]



THIS DOCUMENT IS PROPERTY OF ROTORK GEARS, NEITHER THIS OR ITS CONTENT MAY BE COPIED OR USED IN ANY OTHER WAY DETRIMETAL TO THE INTEREST OF ROTORK GEARS, ACCEPTANCE OF THIS DOCUMENT SHALL CONSTITUTE ACKNOWLEDGEMENT OF THE FOREGOING CONDITIONS

CHAINWHEEL

Drawn: H.L

Dwg Nr.: 0001-001

**Date:** JAN. 2000

Rev.: 05

Contents Subject to change without notice.