


BASEPLATE DETAILS (ALTERNATIVES AVAILABLE ON REQUEST)	
HOLE DETAILS (45° ON CENTRES)	
ISO F07	4 HOLES M8X8(0.315") DEEP ON 070.0(02.756") P.C.
FA07	4 HOLES 5/16"UNCX7.84(0.3125") DEEP ON 069.9(02.75") P.C.

MAX. BORE RECTANGULAR KEY		
STD	BORE	KEY
BS4235	27.6	16 X 10
BS46	1.125"	0.3125" X 0.25"
ANSI B17.1	1.185"	0.25" X 0.1875"

MAX. BORE D-D	
$\varnothing 35.5(1.4)$ DD25.4(1.0")	
MAX. SQUARE	
$\square 25.4(1.0)$	

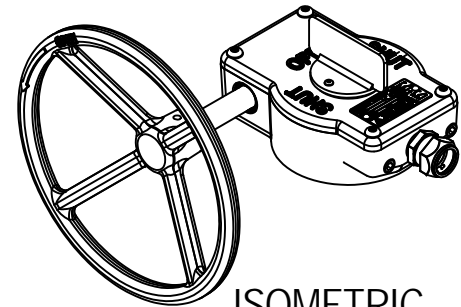

**rotork  
gears**

FB30 ISO UL BASELINE  
 FB30 GEARBOX 330Nm. UL1091 SPECIFICATION. ISO F07.

DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

FOR UP TO DATE DETAILS VISIT [www.rotork.com](http://www.rotork.com)

DRAWING No	DEV0542 SHEET 3/3	Regina House Ring Road Bramley Leeds LS134ET United Kingdom
ISSUE	E	
DATE	02/11/2009	