


NOTES:

1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

A

M10-00

REV
B

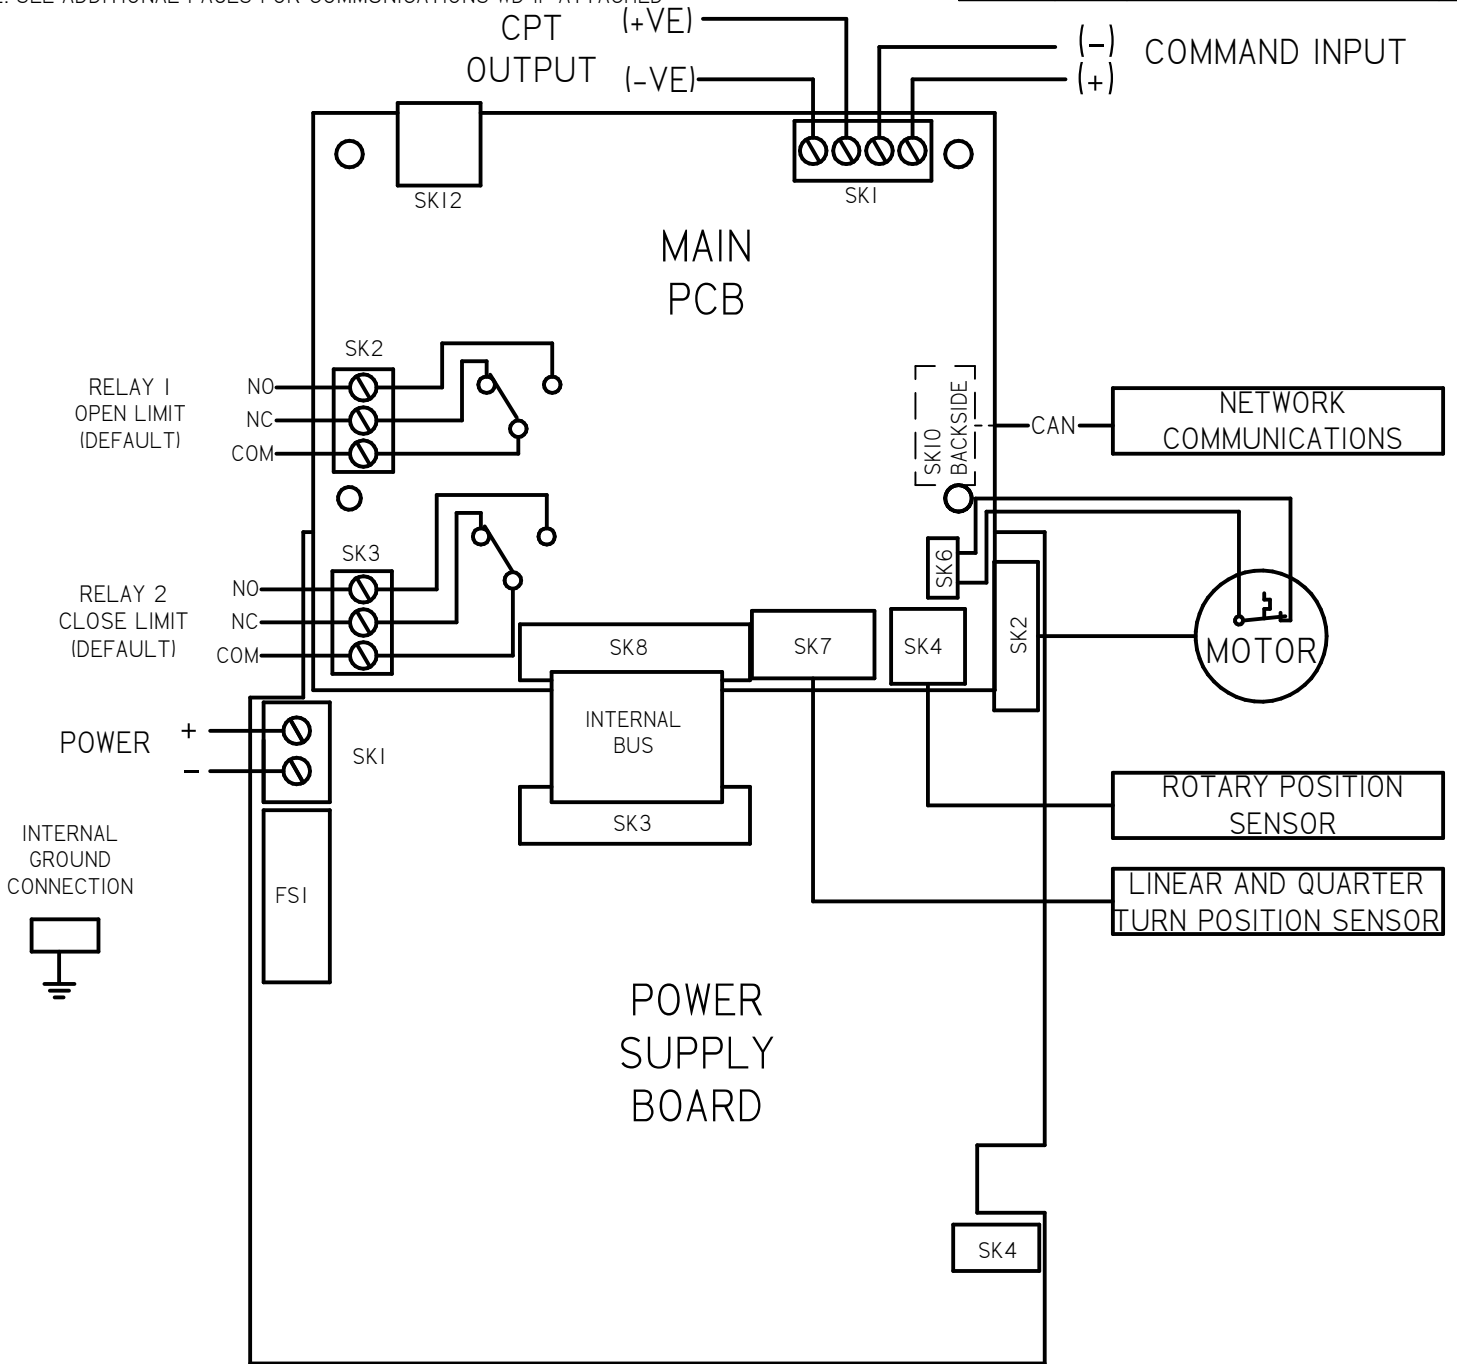

B	ECR 18062. UPDATE PSB: SK1 CONNECTOR	GVM 11-4-14
A	INITIAL RELEASE	GVM 2-8-13
REV	DESCRIPTION	DATE

<p>TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°</p>		
<p>SCALE: NTS</p>		
<p>DRAWN: GVM</p>	<p>PROD. DV.</p>	<p>PROD. ENG. CHK</p>
<p>DATE: 2-8-13</p>	<p>DATE:</p>	<p>DATE: 2-8-13</p>

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

<p>TITLE : CMA WIRING DIAGRAM</p>	
<p>FOR : DC POWER OPERATION</p>	
A	M10-00