
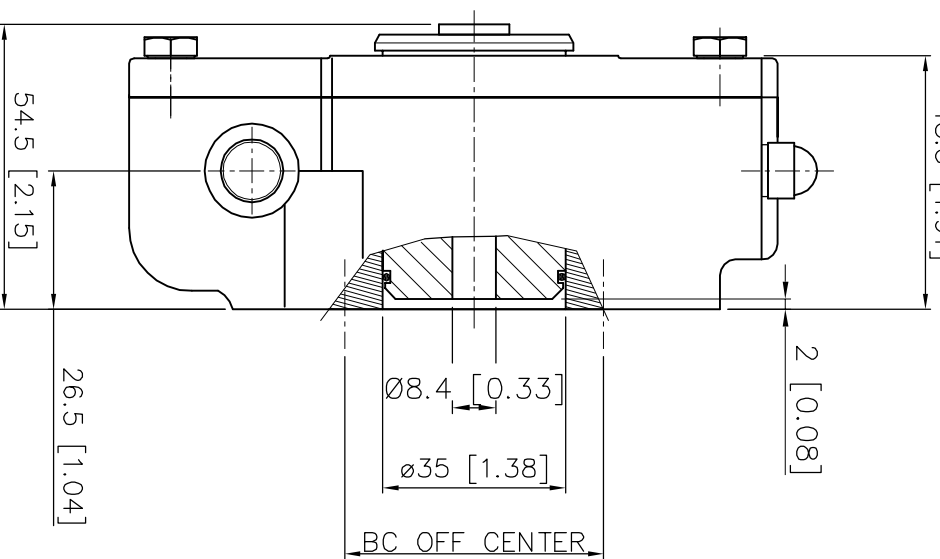


Max. STEM height
diameter dependdable
48.5 [1.91]

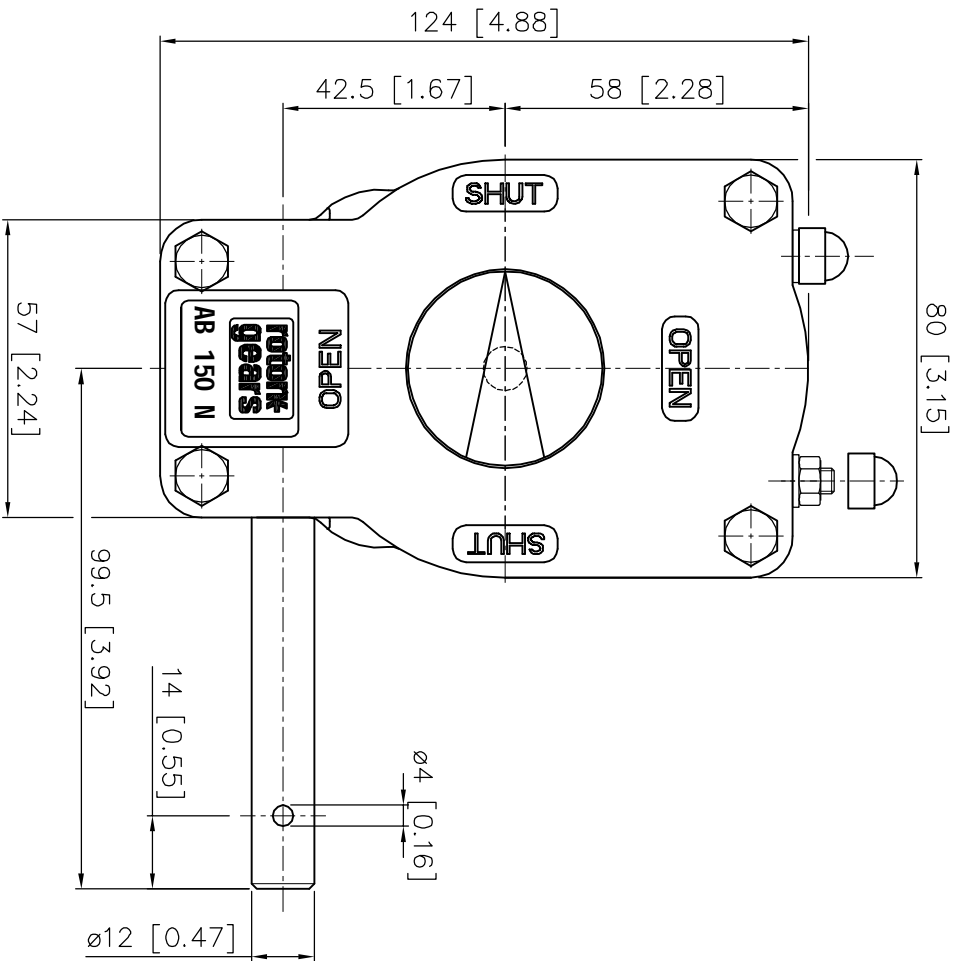

DESCRIPTION


TRAVEL : -5° to 95° adjustable
RATIO : 40 : 1
TURNS TO CLOSE : 10
WEIGHT : 2.2 kg. (4.8 lb) excl.hondwheel

MOUNTINGHOLES

BOLT CIRCLE : min. ø42 [1.65]
(OFF CENTER) : max. ø70 [2.75]
acc. ISO 5211 : F04 - F05 - F07
BORE : min.ø8,4[0,33] max. ø20 [0,79], #17 [0,67]

TORQUE

max.OUTPUT : 150 Nm (1200 lbf.in.)
max.INPUT : 16 Nm (123 lbf.in.)
M.A. : 9.6 ±15%




rotork gears

Nijverheidstroet 25
7581 PV Losser
The Netherlands

GEARBOX AB 150 N

THIS DOCUMENT IS PROPERTY OF ROTORK GEARS. NEITHER THIS OR ITS CONTENT MAY BE COPIED OR USED IN ANY OTHER WAY WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROTORK GEARS. ACCEPTANCE OF THIS DOCUMENT SHALL CONSTITUTE ACKNOWLEDGMENT OF THE FOREGOING CONDITIONS



Drawn : H.H.
Dwg Nr.: D01N-002

Date : 09-03-12

Rev.: 00