

CIRCUIT DRAWN WITH
POWER SUPPLY OFF


FOR TYPICAL REMOTE CONTROL
DETAILS SEE DOCUMENT
No RWS

TRANSFORMER TAPPING OPTIONS

TYPE 1			TYPE 2		
TAP	NOM	RANGE	TAP	NOM	RANGE
X	100	80-120	X	200	160-240
Y	110	88-132	Y	230	184-276
Z	120	96-144	Z	270	216-324
FS1-250mA A/S FS2-5A A/S			FS1-150mA A/S FS2-2.5A A/S		

TYPE 3			TYPE 4		
TAP	NOM	RANGE	TAP	NOM	RANGE
X	380	304-456	X	480	384-576
Y	400	320-480	Y	575	460-690
Z	415	332-498	Z	690	552-828
FS1-100mA A/S FS2-1.5A A/S			FS1-50mA A/S FS2-1.6A F/A		

TRANSFORMER TYPES 1, 2, 3 & 4 -
FUSE FS3 - 20A ATO FAST ACTING

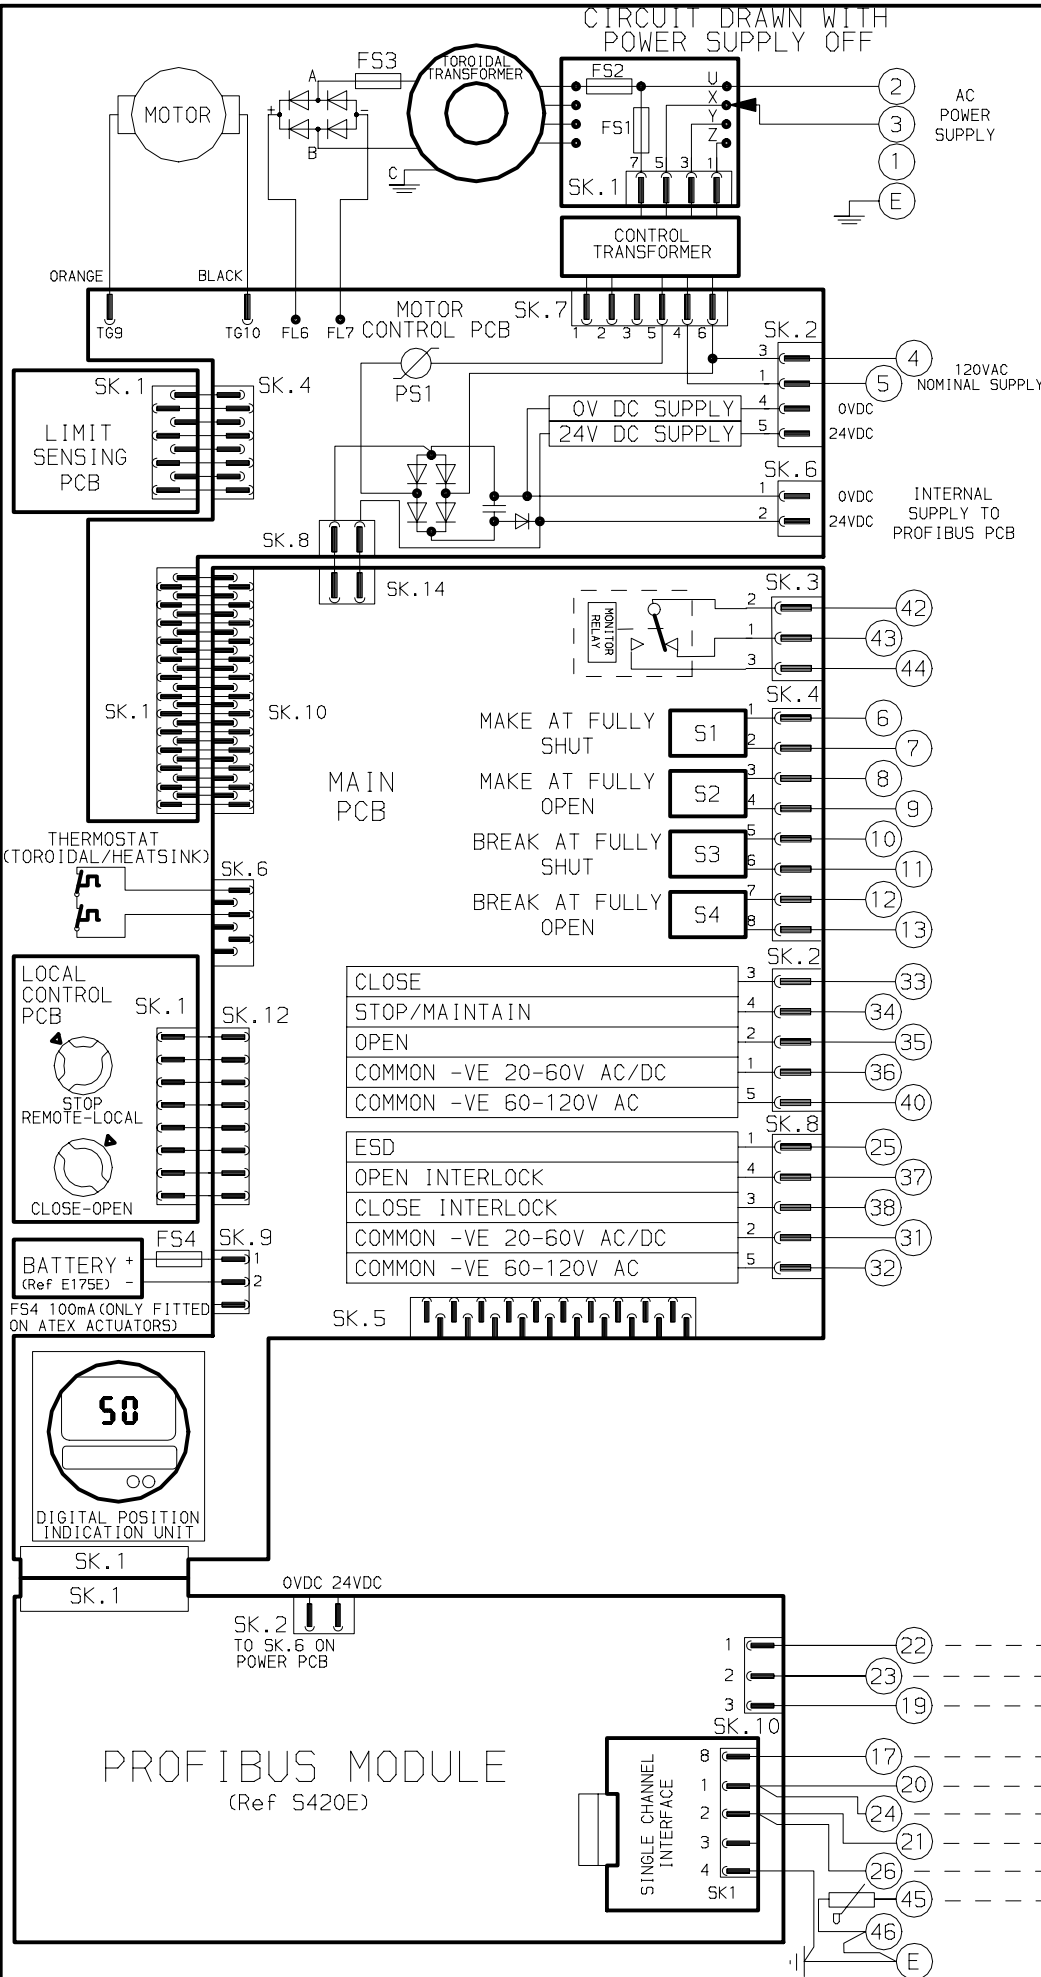

ALL TRANSFORMER TYPES -
PS1 SELF RESETTING FUSE

NOTE

- REFER TO PUBLICATION E175E FOR APPROVED FUSES FS1, FS2 AND FS3.
- MAX EXTERNAL LOAD ON TERMINALS 4 & 5 TO BE 9VA.
- CONTROL SIGNAL THRESHOLD VOLTAGES TO BE MINIMUM 'ON' 20V AC/DC
MAXIMUM 'OFF' = 3V
- MINIMUM CONTROL SIGNAL DURATION TO BE 300ms.
- CURRENT DRAWN FROM EACH REMOTE CONTROL SIGNAL IS 5mA ON 24V DC OR 12mA ON 120V AC
- INDICATION CONTACTS S1-S4 ARE SHOWN IN THEIR DEFAULT CONFIGURATION. CONTACTS MAY BE CONFIGURED FOR ANY OF THE FUNCTIONS DESCRIBED IN E175E

VOLTAGE INPUT (0-5 VOLTS)
+Ve TO 'A', 0 VOLTS TO COMMON
CURRENT INPUT (0-20mA)
LINK A TO B, CURRENT SOURCE BETWEEN A/B AND COMMON.

- 22 --- + ANALOGUE I/P 'A'
 - 23 --- + ANALOGUE I/P 'B'
 - 19 --- + COMMON
 - 17 --- TERMINATOR
 - 20 --- PROFIBUS B(IN)
 - 24 --- PROFIBUS B(OUT)
 - 21 --- PROFIBUS A(IN)
 - 26 --- PROFIBUS A(OUT)
 - 45 --- SCREEN
 - 46 --- E
- PROFIBUS A=TXD/RXD-N
PROFIBUS B=TXD/RXD-P

No 02	DATE 190307	REVISION DETAILS SINGLE CHANEL PROFIBUS UPDATE. EC2197/5	www.rotork.com		CONFIG BY PJV	IQT + 1-CH PROFIBUS + 120VAC ON 4 & 5.
					DATE 141106	
			ROTORK CONTROLS LTD BATH, BA1 3JQ ENGLAND	ROTORK CONTROLS INC ROCHESTER NY 14624, USA	CHECKED DA	CIRCUIT DIAGRAM No -REV 6000-901-02
			Tel:01225-733200	Tel:585-328-1550	BASE WD 6000-901	
					JOB No -	
					M.I.No -	B1 C1 B2 C2