


260 [10.24]

175 [6.89]


130 [5.11]

86 [3.39]

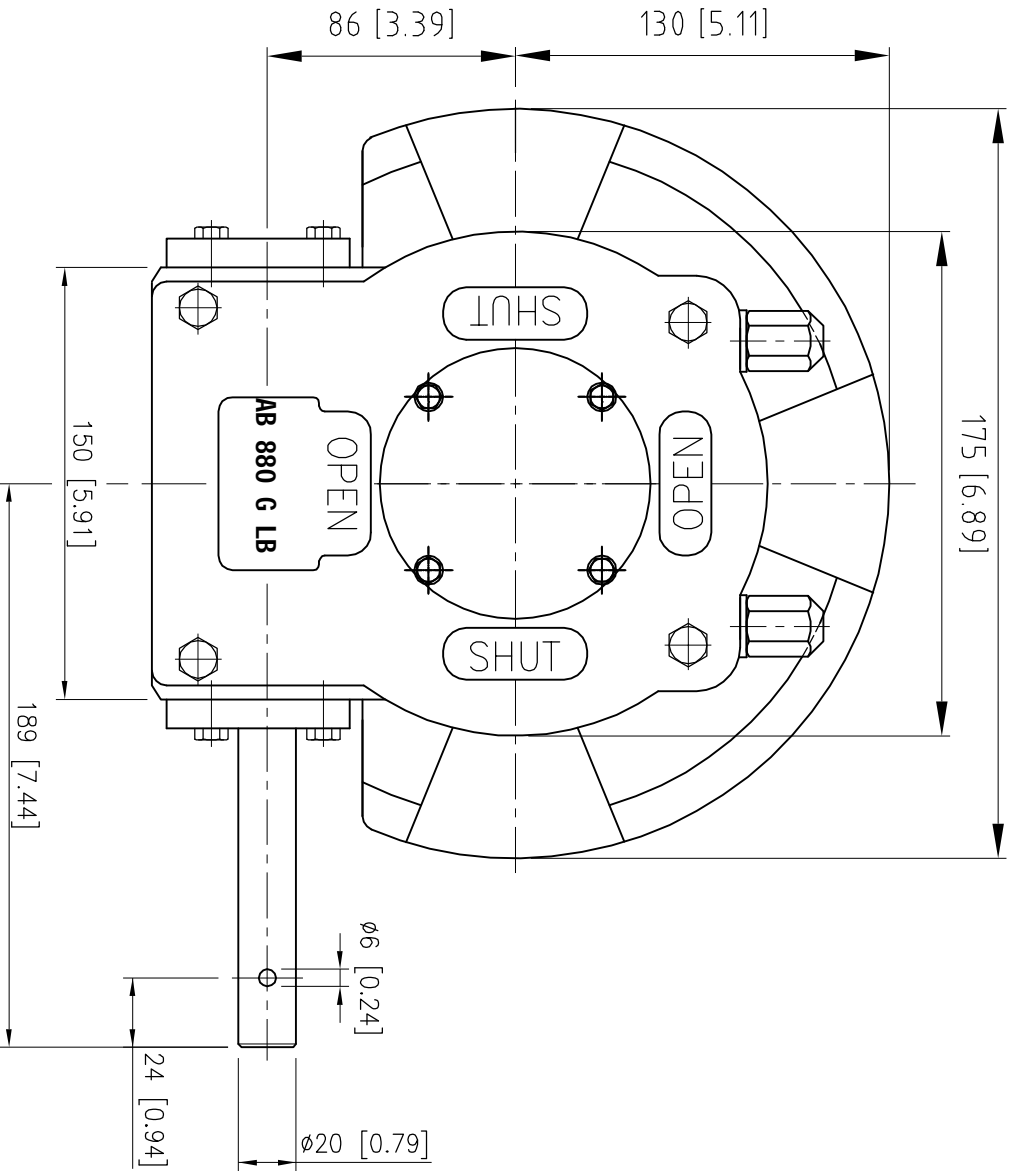

Max. STEM height:

82 [3.23]

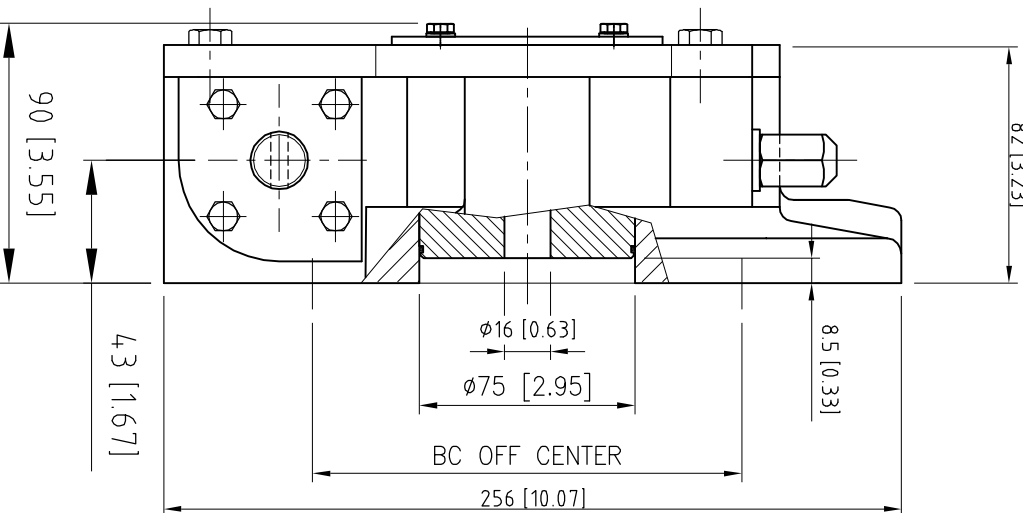

DESCRIPTION


TRAVEL : -5° to 95° adjustable
RATIO : 38 : 1
TURNS TO CLOSE : 9,5
WEIGHT : 17 kg. (37.5Lb) excl.handwheel

MOUNTINGHOLES

BOLT CIRCLE : min. ϕ 102 [4.02]
(OFF CENTER) max. ϕ 220 [8.66] 8x M16
acc. ISO 5211 : F10-F12-F14-F16
BORE : min. ϕ 60 [2.36] #46 [1.81]

TORQUE

max.OUTPUT : 2000 Nm (17701 lbf.in.)
max.INPUT : 152 Nm (1341 lbf.in.)
M.A. : 13.2 ±15%



Dimensions in MM [inch]

rotork gears

Nijenheidestraat 25
72581 PV Losser
The Netherlands

GEARBOX AB 880G BU LB

THIS DOCUMENT IS PROPERTY OF ROTORK GEARS. NEITHER THIS OR ITS CONTENT MAY BE COPIED OR USED IN ANY OTHER WAY PERMITTED TO THE INTEREST OF ROTORK GEARS. ANY VIOLATION OF THIS DOCUMENT SHALL CONSTITUTE A KNOWLEDGEABLE VIOLATION OF THE FOREGOING CONDITIONS



Drawn : S.B.

Date : 05-11-2009

Dwg Nr.: AB 880GLB BU L

Rev.: 01