
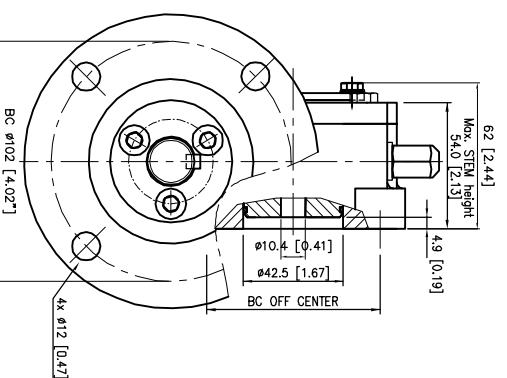


MOVING INDICATOR

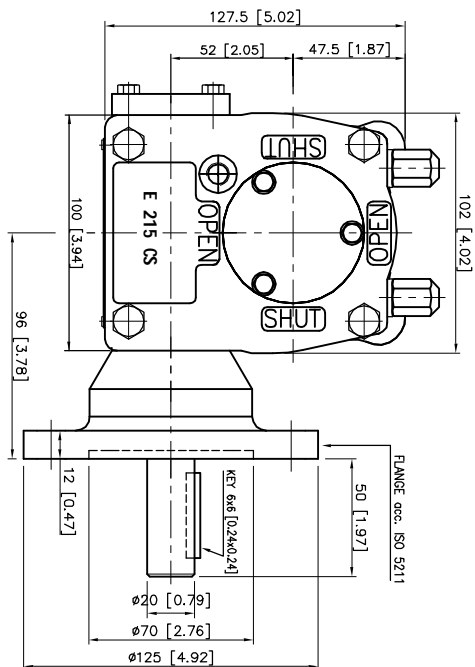

NON MOVING INDICATOR

DESCRIPTION


TRAVEL : 90° ±5° AT BOTH ENDS.
 RATIO : 37 : 1
 TURNS TO CLOSE : 9.25
 WEIGHT : 4 kg.(8.8 lb.) excl.handwheel

MOUNTINGHOLES

BOLT CIRCLE : min. ϕ 50 [1.97]
 (OFF CENTER) max. ϕ 102 [4.02]
 acc. ISO 5211 : F05 - F07 - F10
 BORE : min.8.4[0.33] max. ϕ 30[1.18] #24[0.94]

TORQUE

max.OUTPUT : 500 Nm (4425 lbf.in.)
 max.INPUT : 43 Nm (381 lbf.in.)
 M.A. : 11.6 ±15%




Dimensions in MM [inch]

rotork gears

Nijenheidestraat 25
 72581 PV Losser
 The Netherlands

GEARBOX E 215 CS F10 L

THIS DOCUMENT IS PROPERTY OF ROTORK GEARS. NEITHER THIS OR ITS CONTENT MAY BE COPIED OR USED IN ANY OTHER WAY WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROTORK GEARS. ANY REPRODUCTION OF THIS DOCUMENT SHALL CONSTITUTE A BREACH OF THE ABOVE MENTIONED CONDITIONS.



Drawn : B.H

Date : 20-07-2011

Dwg Nr.: E 215 CS F10 L

Rev.: 00