
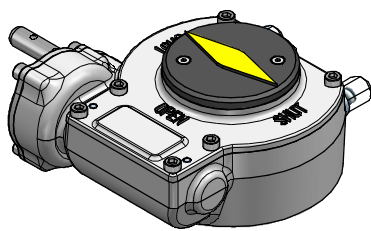
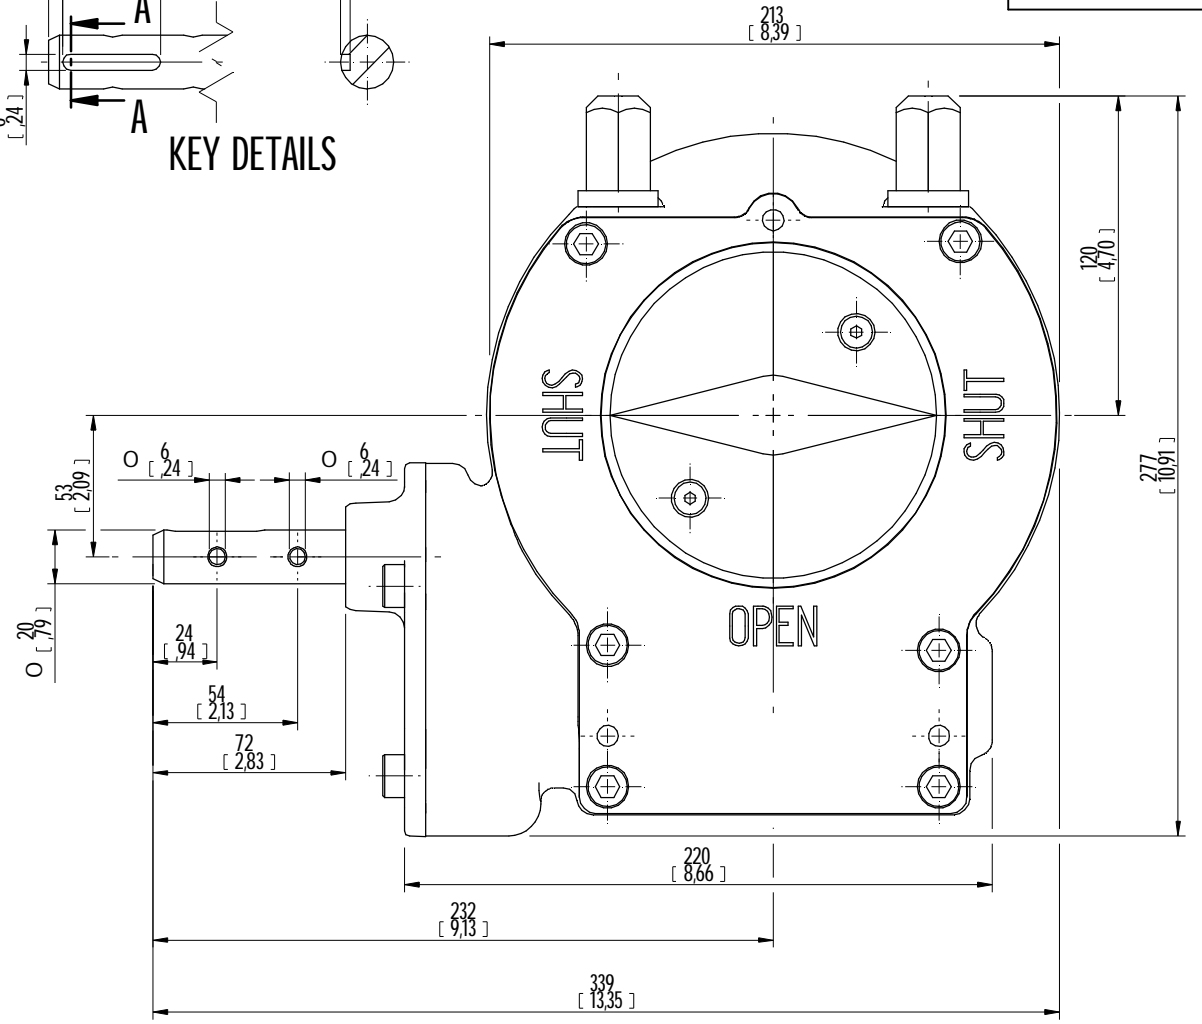
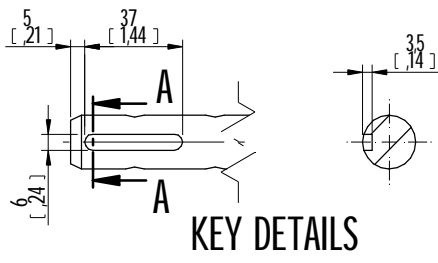
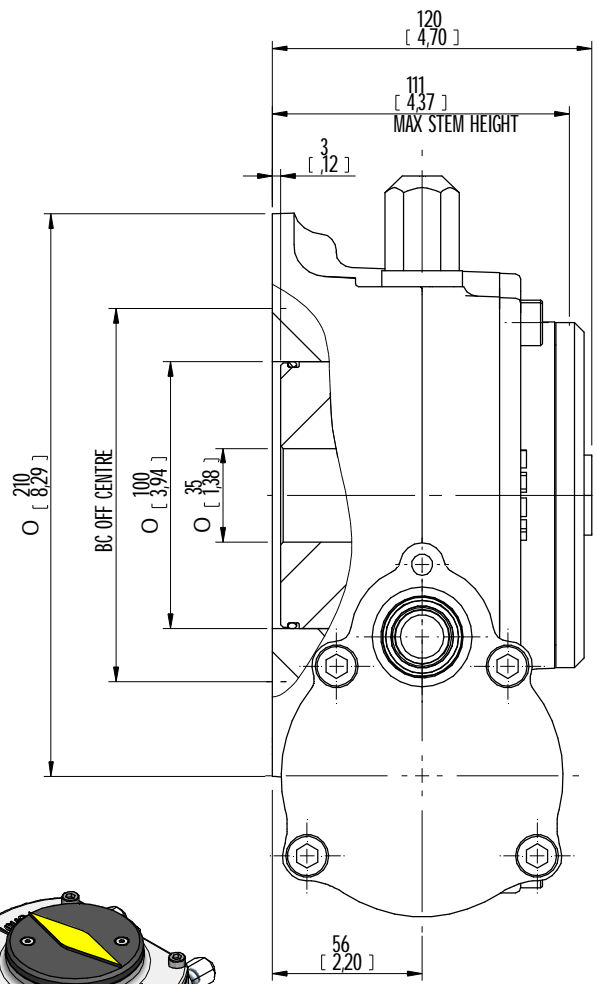


DESCRIPTION				MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)			BORE: STEM ACCEPTANCE WITH KEYWAY IN ACCORDING WITH STANDARD			TORQUE			
RATIO	TURNS TO CLOSE	TRAVEL (1/4 TURN)	WEIGHT	NR of HOLES	MIN PCD - ØHOLE	MAX PCD + ØHOLE	ACCORDING TO ISO 5211 / MSS SP-101	MIN	MAX	STANDARD	OUTPUT	INPUT	MA
109:1	27	-5° TO 95°	24 kg	4	Ø104 mm	Ø195 mm	F12 - F14 - F16	Ø35 mm	Ø80 mm	ISO 773 A	4500 Nm	136 Nm	33 ± 15%
				8	N.A.	N.A.							
			52 lbs	4	Ø4.09 inch	Ø7.67 inch	FA12 - FA14 - FA16						
				8	N.A.	N.A.							

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT www.rotork.com

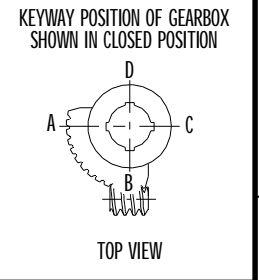

ISOMETRIC VIEW
1:5

	Document type DETAIL DRAWING		Title AB2000	
	Dimensions in mm Scale 1:2		AB2000 W-TYPE ASSEMBLY F16 BASE, RH PROJECTION	
Created M R	6-12-2012	Drawing Number AB2000W RH		Rev A
Checked P LINE	27-2-2013	Sheet 1 of 3		Size A3
Approved -	DD-1111-YYYY	Sheet 1 of 3		Size A3

OO	Rev	CN	Revised	Approved	DD-MMM-YYYY	DATE	FIRST ISSUE	Change Description

Rev 01