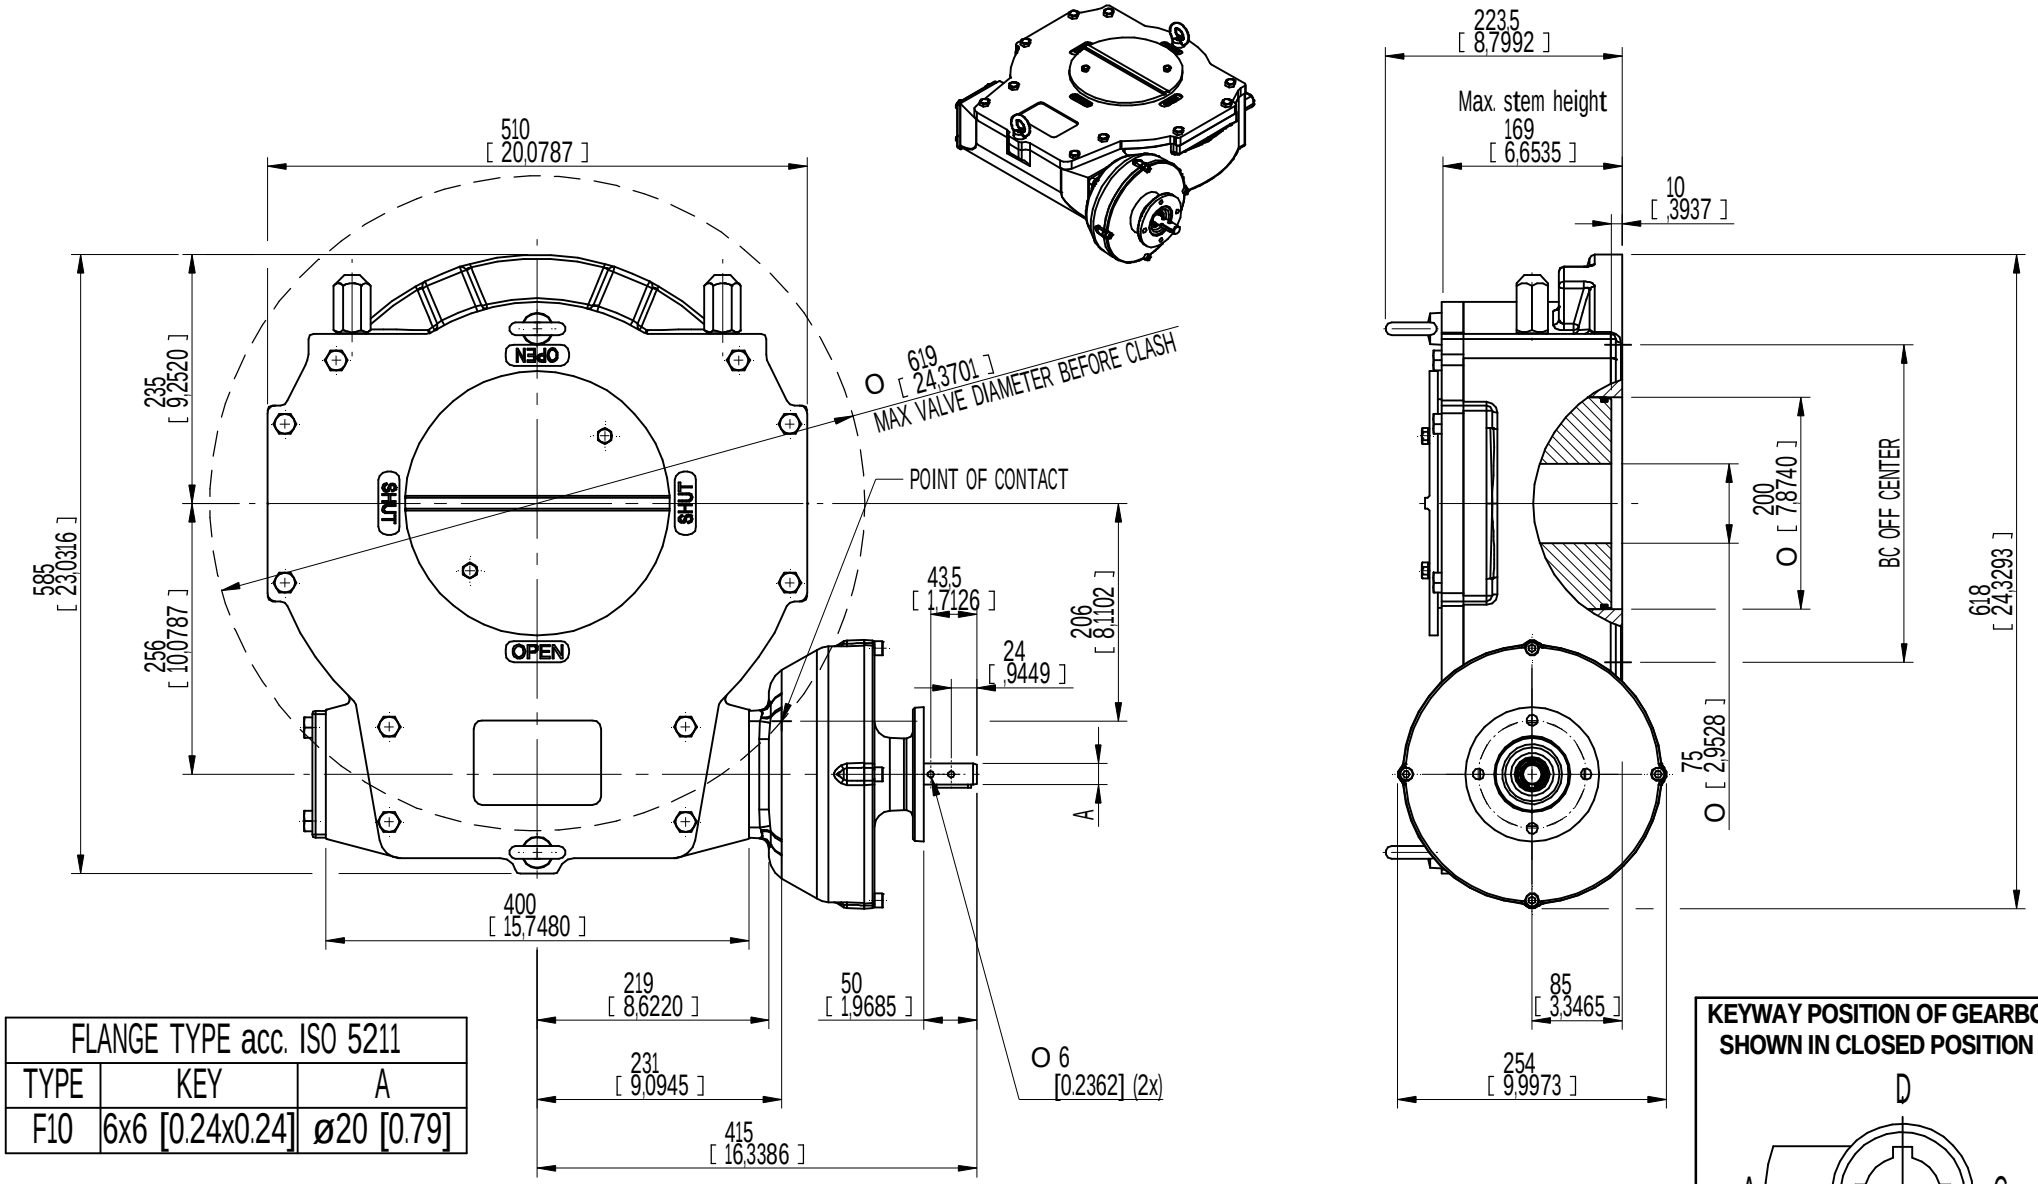

FLANGE TYPE acc. ISO 5211		
TYPE	KEY	A
F10	6x6 [0.24x0.24]	ø20 [0.79]

KEYWAY POSITION OF GEARBOX SHOWN IN CLOSED POSITION



DESCRIPTION:

TRAVEL : -5° TO 95° adjustable
RATIO : 729 : 1
TURNS TO CLOSE : 182.25
WEIGHT : 219.4kg. (482.7 lb.) Excl. handwheel

MOUNTING HOLES :

BOLT CIRCLE (OFF CENTER) acc. ISO 5211 : min. Ø 254 [10.00] max. Ø 406 [15.98] F25-F30-F35-F40
MIN. bore Quadrant : Ø 75 [2.95]
MAX. bore Quadrant : ☑115 [4.53] or Ø 160 [6.30]

TORQUE :

max. OUTPUT : 32000 Nm (283224 lbf.in.)
max. INPUT : 142 Nm (1259 lbf.in.)
MA : 225.0 ± 15%

DIMENSIONS IN MM[INCH]

ROTORK GEARS

GEARBOX E250N-PR10

DRAWN:- Robbin Goosen CHECKED:- Henk Hoff
DWG:- E250N-PR10 REV: 01