

DESCRIPTION:


TRAVEL : -5° TO 95° adjustable
 RATIO : 870 : 1
 TURNS TO CLOSE : 217.25
 WEIGHT : 219.4kg. (482.7 lb.) Excl. handwheel

MOUNTING HOLES :

BOLT CIRCLE : min. ϕ 254 [10.00]
 (OFF CENTER) max. ϕ 406 [15.98]
 acc. ISO 5211 : F25-F30-F35-F40
 MIN. bore Quadrant : ϕ 75 [2.95]
 MAX. bore Quadrant : ϕ 115 [4.53] or ϕ 160 [6.30]

TORQUE :

max. OUTPUT : 32000 Nm (283224 lbf.in.)
 max. INPUT : 142 Nm (1259 lbf.in.)
 MA : 225.0 \pm 15%

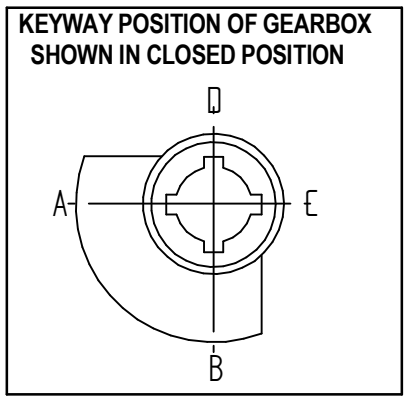

DIMENSIONS IN MM [INCH]

ROTORK GEARS

GEARBOX A250N-PR10 + PADLOCK

DRAWN:- Robbin Goosen CHECKED:- Henk Hoff

DWG:- A250N-PR10 + PADLOCK REV: 01