

DESCRIPTION:

TRAVEL : -5° TO 95° adjustable
RATIO : 326 : 1
TURNS TO CLOSE : 81.5
WEIGHT : 93 kg. (204 lb.) Excl. handwheel


MOUNTING HOLES :

BOLT CIRCLE : min. Ø 165 [6.50]
(OFF CENTER) : max. Ø 356 [14.02]
acc. ISO 5211 : F16 - F25 - F30 - F35
Min. bore Quadrant : Ø 30 [1.18]
MAX. bore Quadrant : ∇ 75 [2.95] or Ø 100 [3.94]

TORQUE :

max. OUTPUT : 12500 Nm (110634 lbf.in.)
max. INPUT : 130 Nm (1152 lbf.in.)
MA : 96.0 ± 15%

DIMENSIONS IN MM [INCH]

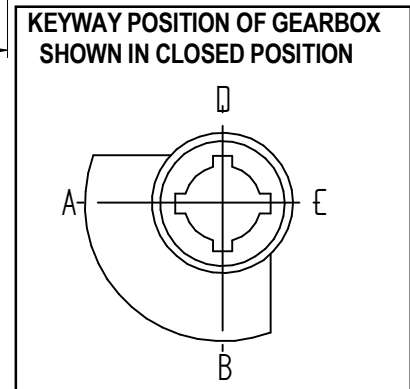

ROTORK GEARS

GEARBOX AB6800N-PR4 LB + PADLOCK

DRAWN:- Robbin Goosen CHECKED:- Henk Hoff

DWG:- AB6800N-PR4 LB + Padlock

REV: 01