

NOTES:


1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

SHT  
1 OF 2

**A**

M11-00

REV  
**B**

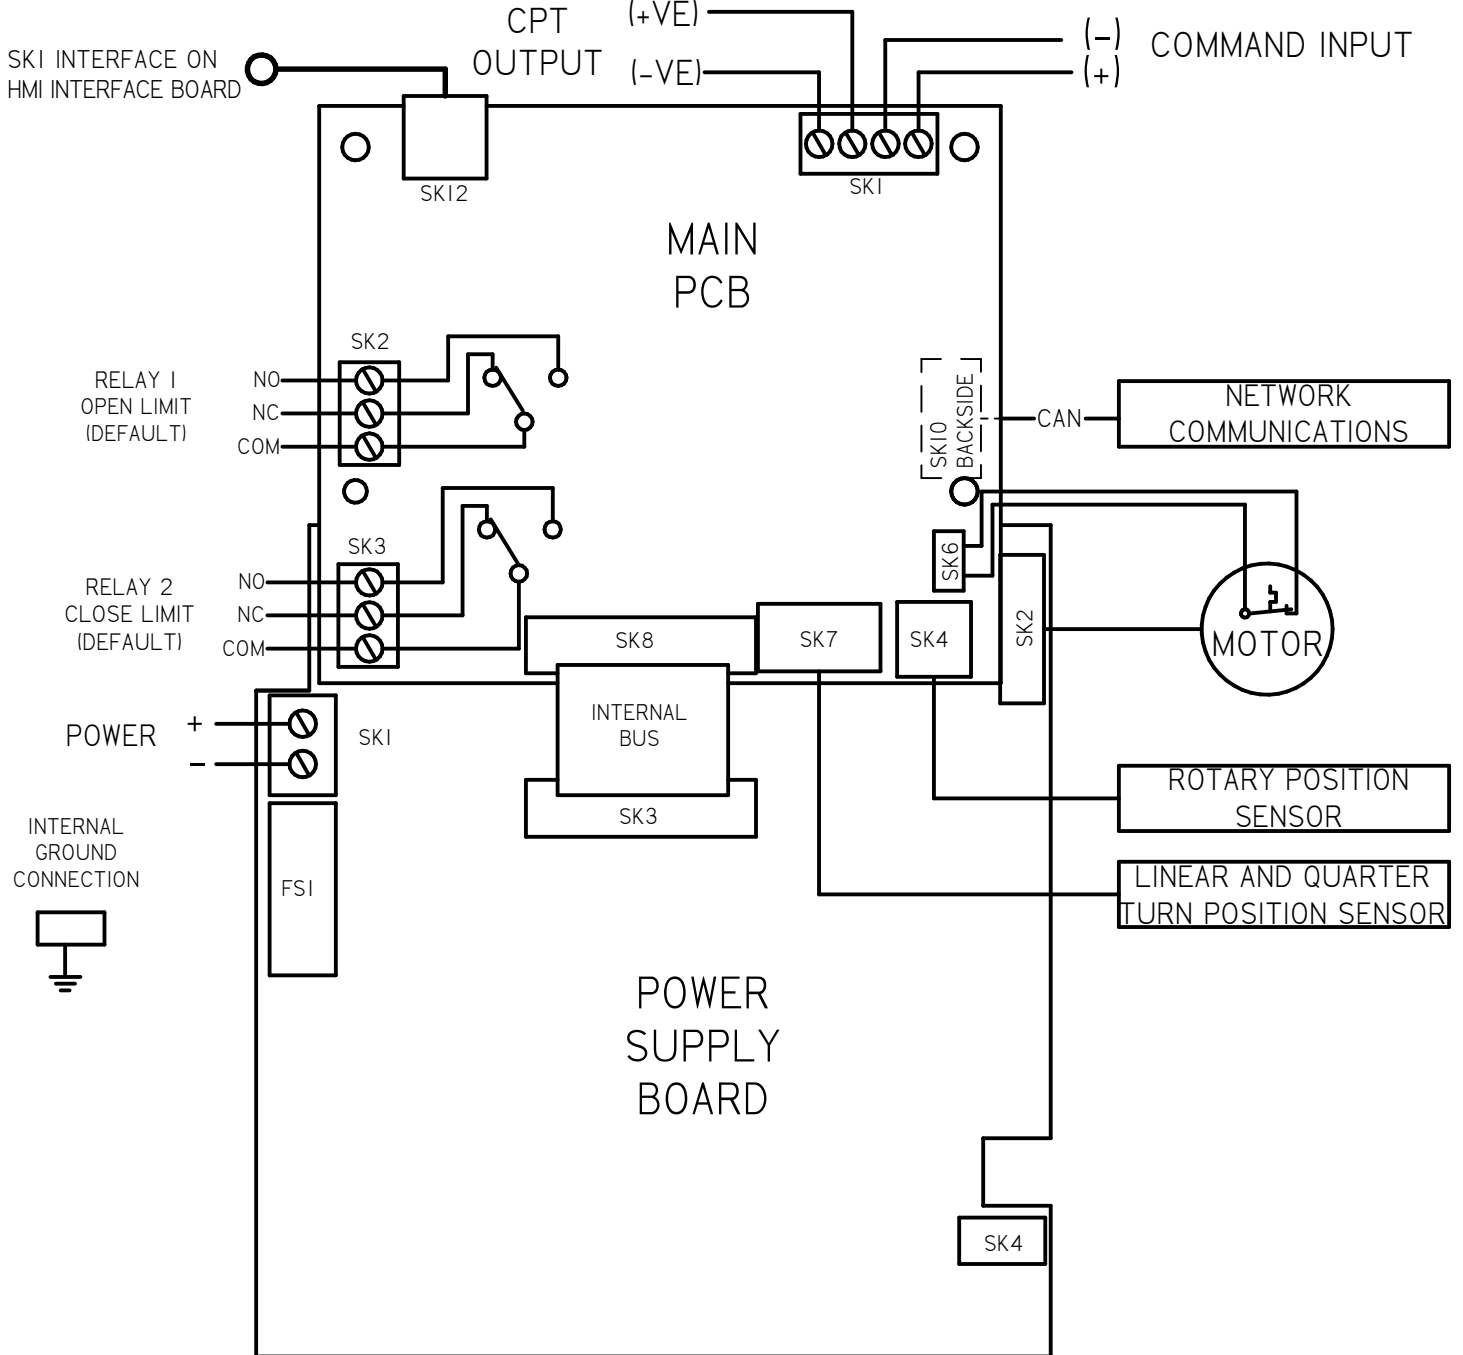

B	ECR 18062. UPDATE PSB: SK1 CONNECTOR	GVM 11-4-14
A	INITIAL RELEASE	ECE 24SEP14
REV	DESCRIPTION	DATE


<p><b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°</p>		
SCALE: <b>NTS</b>		
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.
DATE: <b>24SEP14</b>	DATE:	DATE:

**rotork**  
Process Controls  
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : <b>CMA WIRING DIAGRAM</b>		
FOR : DC POWER OPERATION LOCAL CONTROLS		
SHT 1 OF 2	<b>A</b>	M11-00

# HMI INTERFACE BOARD

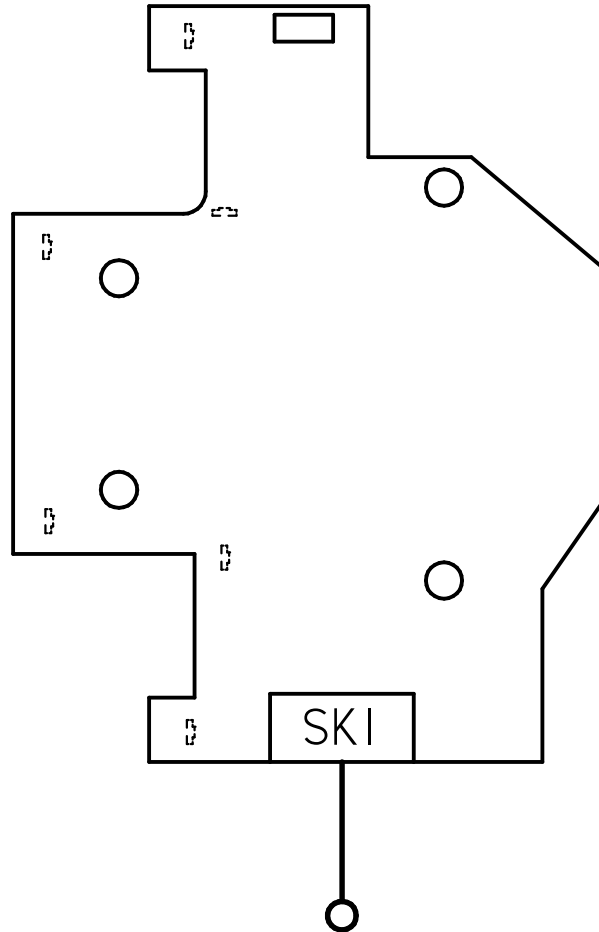

SK12 INTERFACE ON  
MAIN PCB BOARD

B	ECR 18062. UPDATE PSB: SK1 CONNECTOR	GVM 11-4-14
A	INITIAL RELEASE	ECE 24SEP14
REV	DESCRIPTION	DATE

<p><b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°</p>		
<p>SCALE:    <b>NTS</b></p>		
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.
DATE: <b>24SEP14</b>	DATE:	DATE:

**rotork**<sup>®</sup>  
**Process Controls**  
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

<p>TITLE : <b>CMA WIRING DIAGRAM</b></p>		
<p>FOR : DC POWER OPERATION LOCAL CONTROLS</p>		
SHT 2 OF 2	<b>A</b>	<b>M11-00</b>