

CIRCUIT DRAWN WITH POWER SUPPLY OFF

FOR TYPICAL REMOTE CONTROL  
DETAILS SEE DOCUMENT  
**No RWS**

TRANSFORMER TAPPING OPTIONS

TYPE 1

TAP	NOM 50/60HZ	50HZ	60HZ
W	220/230	176-242	198-259
X	380/400	304-418	342-446
Y	415/420	332-457	374-487
Z	440/460	352-484	396-517

FUSE FS1 - 250mA ANTI-SURGE

TYPE 2

TAP	NOM 50/60HZ	50HZ	60HZ
W	346/380	285-388	321-419
X	480/500	406-552	432-564
Y	240/240	192-261	216-282
Z	550/575	445-605	501-625

FUSE FS1 - 250mA ANTI-SURGE

THE ACTUATOR MUST BE PROTECTED USING SUITABLY RATED HIGH SPEED SEMI-CONDUCTOR FUSES ON THE INCOMING SUPPLY.

SUGGESTED FUSES:-  
IQ10-20:10 Amp Ferraz G330010  
IQ25-35:20 Amp Ferraz K330013  
or EQUIVALENT PROTECTIVE DEVICE.

ALL TRANSFORMER TYPES - PS1 SELF  
RESETTING  
FUSE

NOTE

REFER TO PUBLICATION E170E FOR APPROVED FUSES FS1 AND FS2.

FOR TYPICAL REMOTE CONTROL INDICATING, MONITORING AND ALARM CIRCUITS SEE PUBLICATION E420E

MAX EXTERNAL LOAD ON TERMINALS 4 & 5 TO BE 5W.

CONTROL SIGNAL THRESHOLD VOLTAGES TO BE MINIMUM 'ON' 20V AC/DC  
MAXIMUM 'OFF' = 3V  
MINIMUM CONTROL SIGNAL DURATION TO BE 100ms.

CURRENT DRAWN FROM EACH REMOTE CONTROL SIGNAL IS 5mA ON 24V DC

BRAKE ENABLE  
LINK 4 TO 15 & 5 TO 18 TO ENABLE BRAKE  
PAKSCAN ONLY


CARE SHOULD BE TAKEN TO ENSURE THAT CIRCUITS CONNECTED TO TERMINALS 4 OR 5 ARE NOT CONNECTED DIRECTLY OR INDIRECTLY TO GROUND.

--- ANALOGUE IN 'A'  
--- COMMON 'A'  
--- ANALOGUE IN 'B'  
--- COMMON 'B'

--- 2 WIRE 'A' (IN)  
--- 2 WIRE 'B' (OUT)  
--- 2 WIRE 'C' COMMON

--- 2 WIRE 'A' (IN)  
--- 2 WIRE 'B' (OUT)  
--- 2 WIRE 'C' COMMON  
--- SCREEN

LINK FITTED BY ROTORK

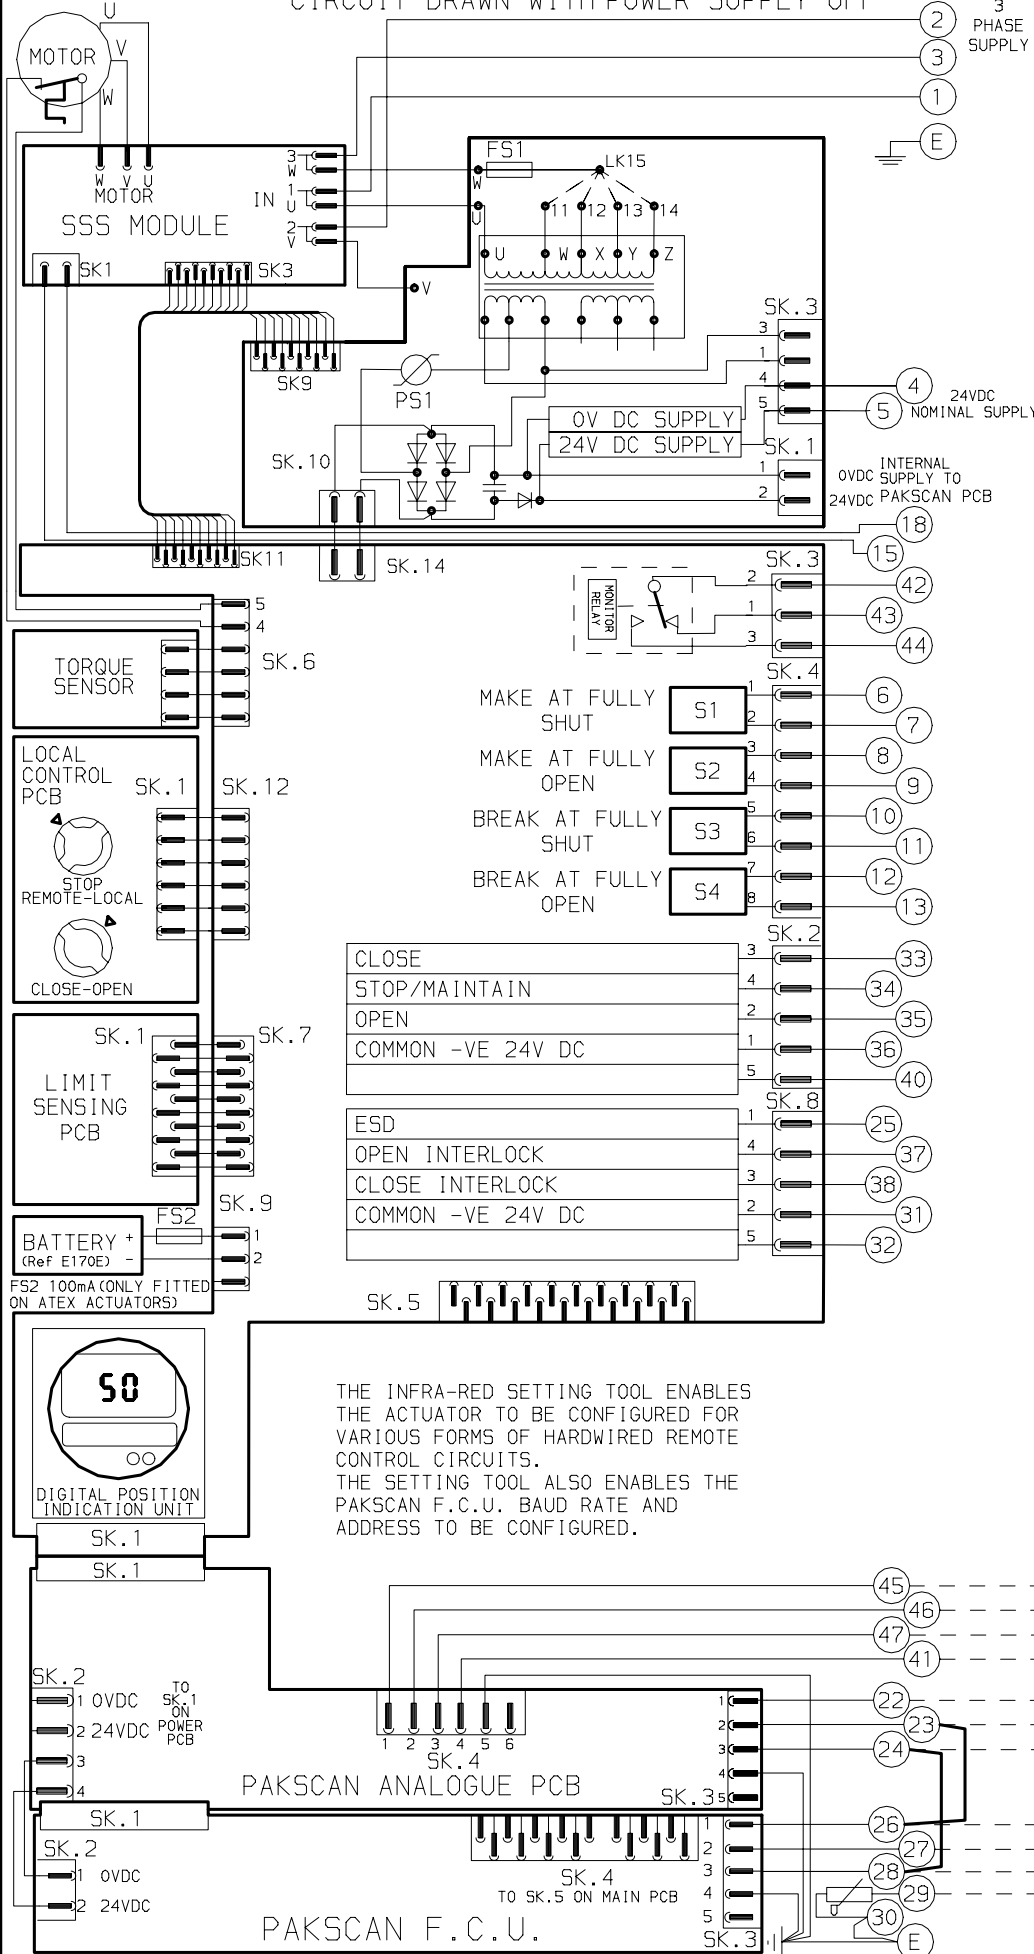

THE INFRA-RED SETTING TOOL ENABLES THE ACTUATOR TO BE CONFIGURED FOR VARIOUS FORMS OF HARDWIRED REMOTE CONTROL CIRCUITS.  
THE SETTING TOOL ALSO ENABLES THE PAKSCAN F.C.U. BAUD RATE AND ADDRESS TO BE CONFIGURED.

No	DATE	REVISION DETAILS
03	250210 PJW	SSS UPDATED TO CELDUC. Checked: JCI EC2680/1

**www.rotork.com**

ROTORK CONTROLS LTD BATH, BA1 3JQ ENGLAND Tel: 01225-733200	ROTORK CONTROLS INC ROCHESTER NY 14624, USA Tel: 585-328-1550
--	--

CONFIG BY PRE  
DATE 111004  
CHECKED PJW  
BASE WD 5000-300  
JOB No --  
M.I.No .

**IQM + PAKSCAN & PAKSCAN ANALOGUE PCB**

CIRCUIT DIAGRAM No -REV 102  
**5000-300-03**

B1 C1 B2 C2