
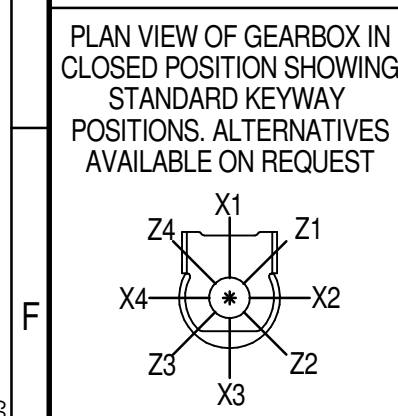


1	2		3		4		5		6			7		8	
INPUT FLANGE DETAILS							MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)								
INPUT FLANGE	FLANGE O/DIA. + THICKNESS	SHAFT DIA.	RECESS DIA.	RECESS DEPTH	HOLE DETAILS (22.5° OFF CENTRES)	KEY DETAILS	ISO 5211 / MSS SP-101 MOUNTING OPTION	HOLE DETAILS (22.5° OFF CENTRES)	STANDARD	MIN BORE	SQ KEY MAX BORE	SQ KEY SIZE	RECT. KEY MAX BORE	RECT. KEY SIZE	SQ BORE MAX
ISO F30	Ø350 x 20 (Ø13.78" x 0.787")	Ø50.00-0.05 (Ø1.969"-0.002")	Ø230.10+0.10 (Ø9.095"+0.004")	6 (0.24")	8 x Ø20.5 ON Ø298.0 P.C. (8 x Ø0.81" ON Ø11.73" P.C.)	14x9x100 (0.55"x0.35"x3.94")	ISO F40*	8 x M36 x 36 (1.42") DEEP ON Ø406.0 (Ø15.98") P.C.	BS4235	-	-	-	203	50 x 28	□ 152.6 (6.00")
ROTORK G30	Ø418 x 20 (Ø16.46" x 0.787")	Ø50.00-0.05 (Ø1.969"-0.002")	Ø216.10+0.10 (Ø8.508"+0.004")	6 (0.24")	8 x Ø23.0 ON Ø356.0 P.C. (8 x Ø0.91" ON Ø14.02" P.C.)	14x9x100 (0.55"x0.35"x3.94")	FA40*	8 x 1.25" UNC x 36 (1.42") DEEP ON Ø406.4 (Ø16.00") P.C.	ANSI B17.1	-	7.375"	1.3/4" SQ.	7.625"	2" x 1.1/2"	
									DIN 6885	-	-	-	203	50 x 28	

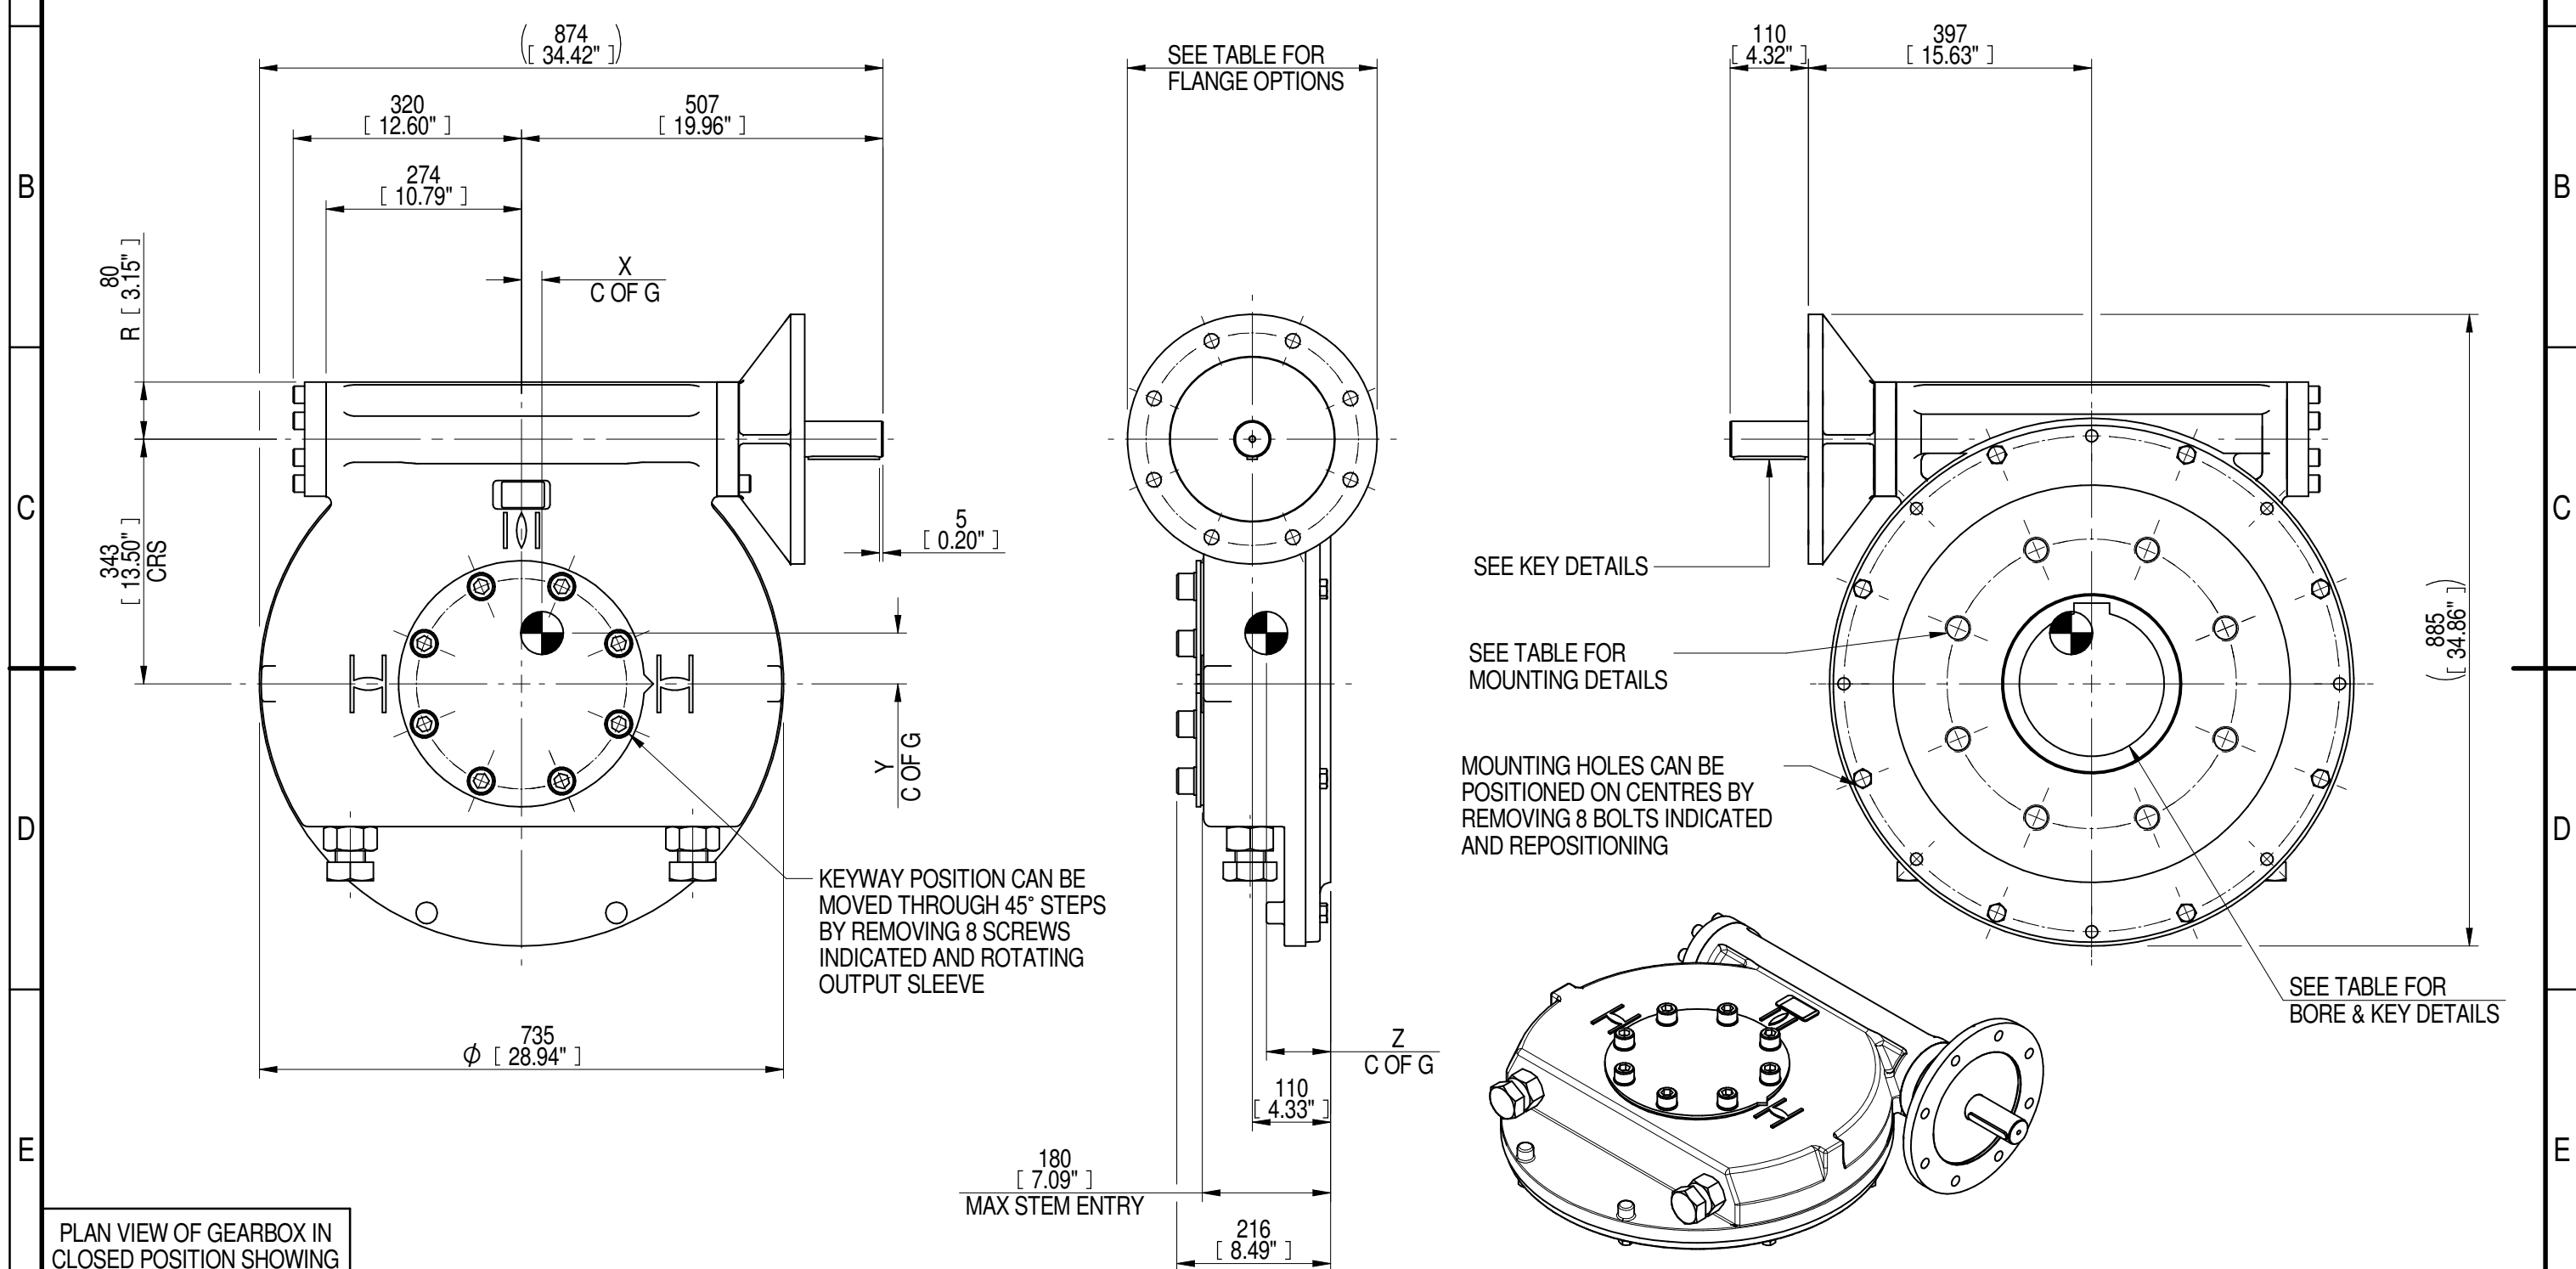

NOTES:
 1. * THREAD DEPTH DOES NOT MATCH ISO STANDARD
 2. CENTRE OF GRAVITY POSITION IS INDICATIVE FOR STANDARD BUILD WHEN IN POSITION SHOWN

	60	15	25	342	65078	2603	29	71	90
RATIO									
TURNS TO CLOSE									
M.A. ± 10%									
WEIGHT (Kg)									
MAX OUTPUT (Nm)									
MAX INPUT (Nm)									
X									
Y									
Z									
DESCRIPTION					TORQUE			CENTRE OF GRAVITY	

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT www.rotork.com

rotork Gears
 LEEDS - UK
www.rotork.com

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. ©2016

Document Type **PUBLICITY**
 Dimensions in mm

Title
IW/MOW10 QUARTER TURN GEARBOX, 60:1 F30/ ROTORK G30 INPUT: F40/ FA40 OUTPUT

Drawing Number
PUB-IW10FB-F30-F40

Sheet 1 of 1 Size A3