
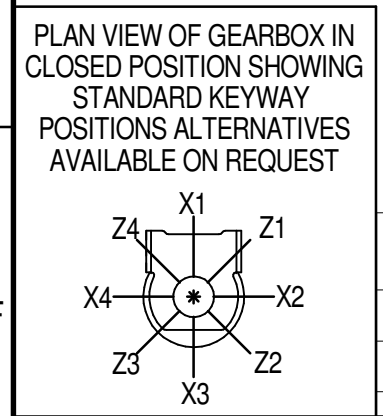
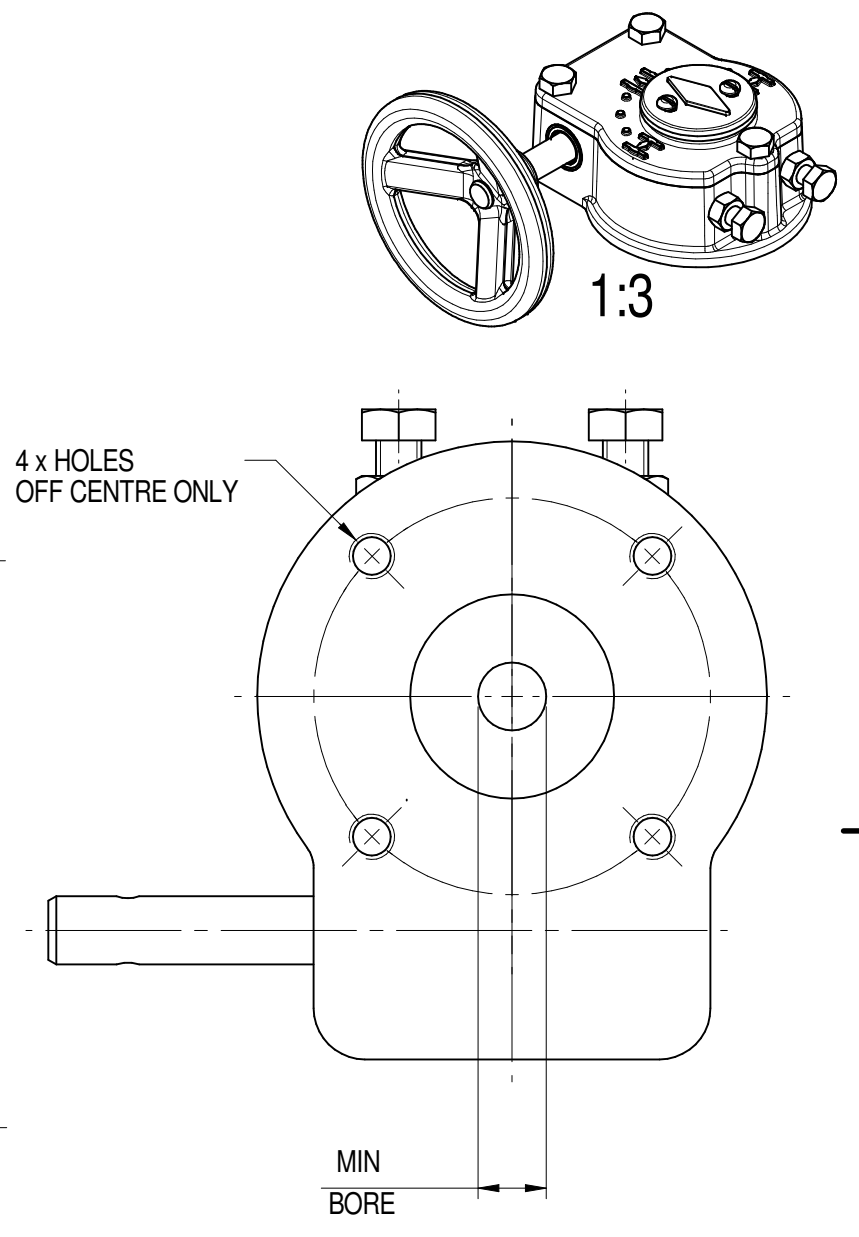
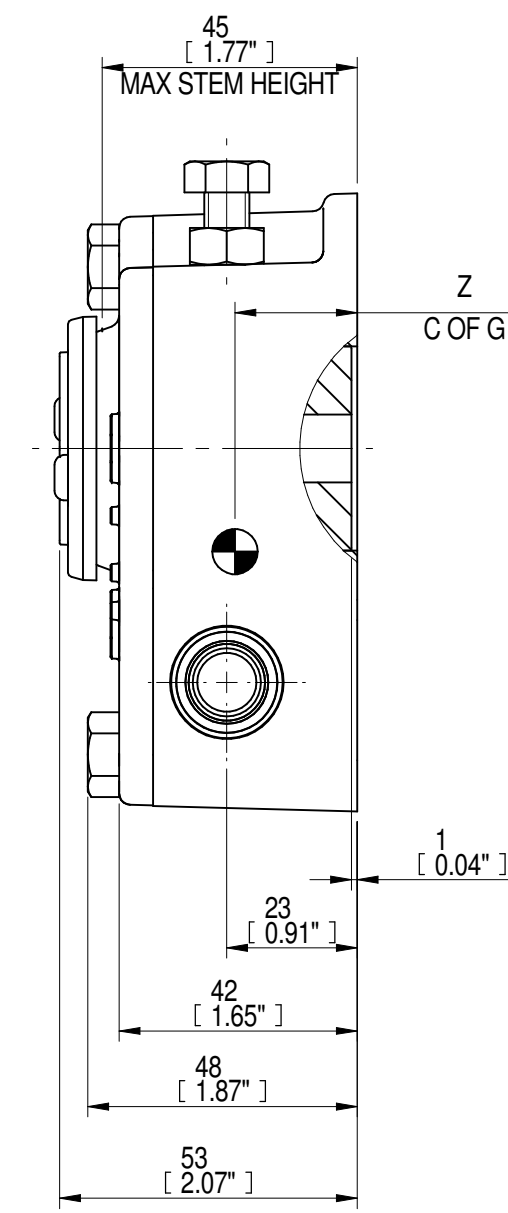


INPUT FLANGE DETAILS							MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)				STEM ACCEPTANCE IN ACCORDANCE TO STANDARD						
INPUT FLANGE	FLANGE O/DIA.	SHAFT DIA.	RECESS DIA.	RECESS DEPTH	HOLE DETAILS (OFF CENTRES)	KEY DETAILS	ISO 5211 / MSS SP-101 MOUNTING OPTION	HOLE DETAILS (OFF CENTRES)	MAX OUTSIDE DIA. INCLUDING DRILLED HOLES	MIN INSIDE DIA. INCLUDING DRILLED HOLES	SQ BORE MAX	STANDARD	MIN BORE	SQ KEY MAX BORE	SQ KEY SIZE	RECT. KEY MAX BORE	RECT KEY SIZE
MANUAL	N/A	12 +0/-0.1	N/A	N/A	N/A	N/A	F05	4xM6 ON A Ø50 P.C	Ø48	Ø78	□20 □0.79"	BS4235 BS46	Ø12	Ø22	6x6	-	-
							F07	4xM8 ON A Ø70 P.C	Ø1.89"	Ø3.07"	□0.79"	ANSI B17.1 DIN 6885	Ø0.48"	Ø0.87"	3/6" x 3/16"	Ø0.92"	1/4" x 1/4"

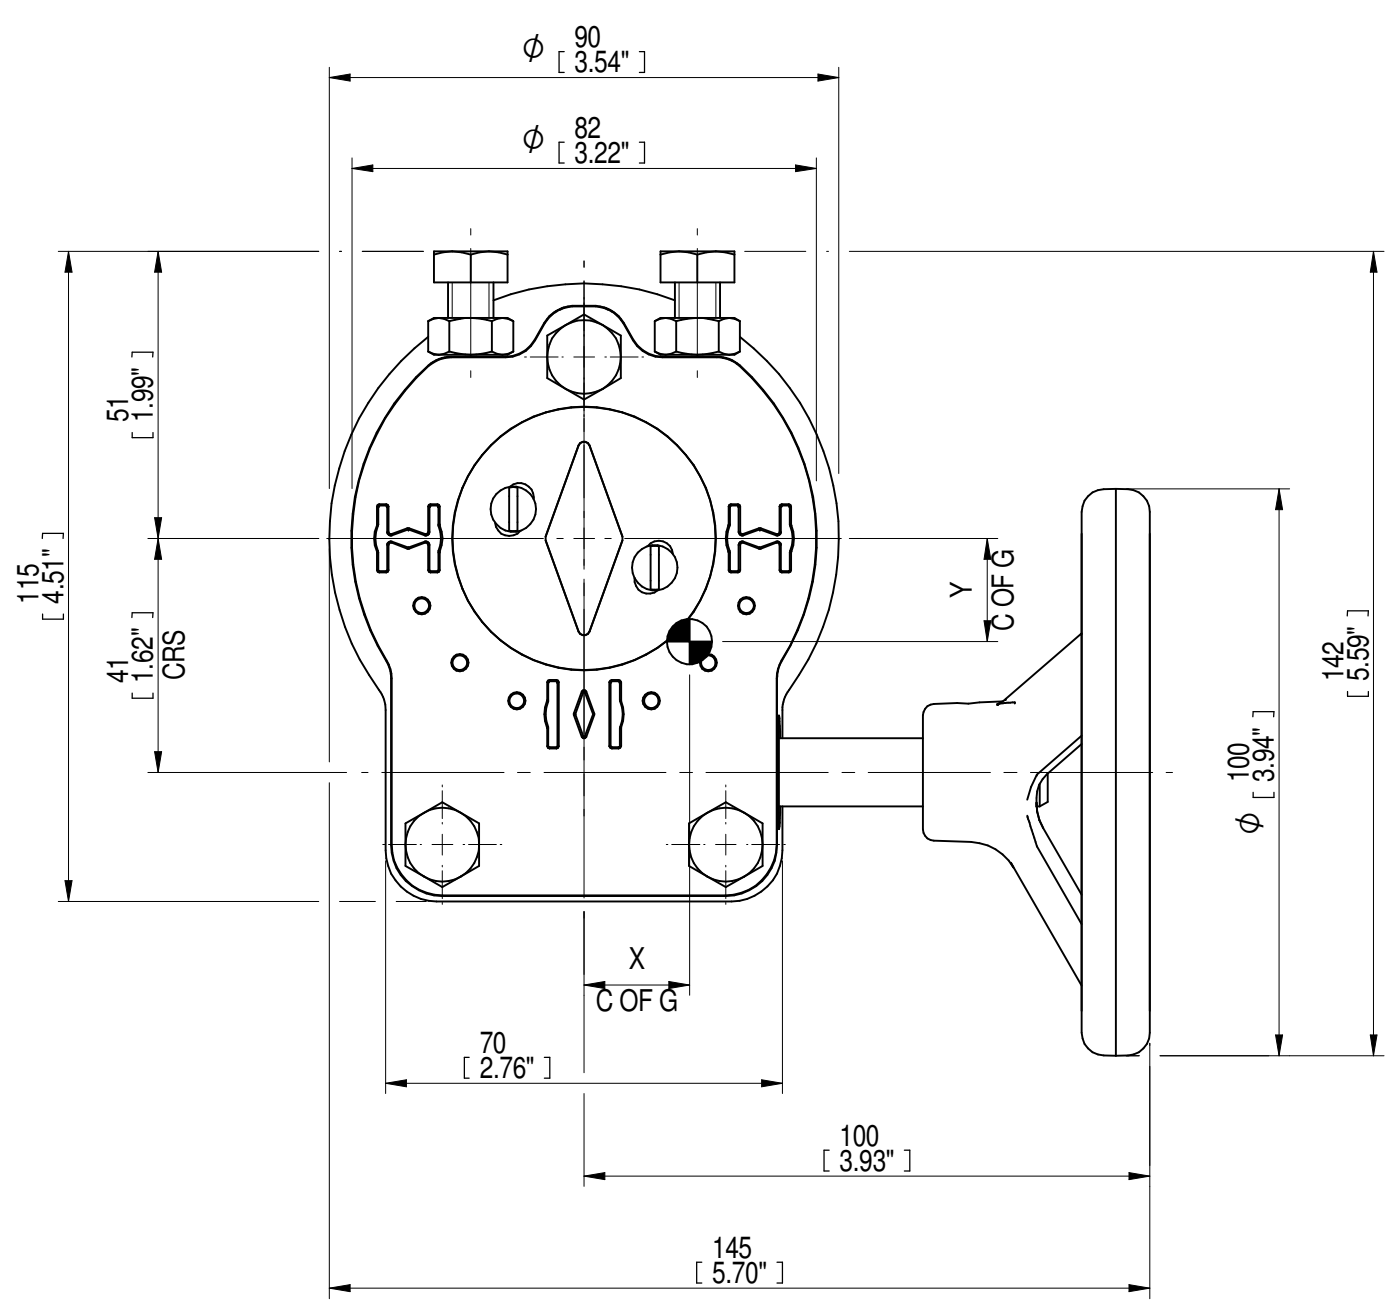

NOTES:
1. CENTRE OF GRAVITY POSITION IS INDICATIVE FOR STANDARD BUILD WHEN IN POSITION SHOWN

RATIO	TURNS TO CLOSE	M.A.	WEIGHT	MAX OUTPUT	MAX INPUT	X	Y	Z
40:1	10	10 ± 15%	2.1 kg 4.6 lb	150 Nm 110 lbf.ft	18.75 Nm 13.75 lbf.ft	19	18	22
DESCRIPTION			TORQUE			CENTRE OF GRAVITY		

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT www.rotork.com

rotork Gears
LEEDS - UK
www.rotork.com

Document Type **PUBLICITY**
Dimensions in mm

Title
**QTW150 STANDARD DUTY
MANUAL INPUT, 40:1, LH**

Drawing Number
PUB-QTW150

Sheet 1 of 1 Size A3

Iss. 02