

NOTES:


1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

SHT
1 OF 2

A

M02-00

REV
A

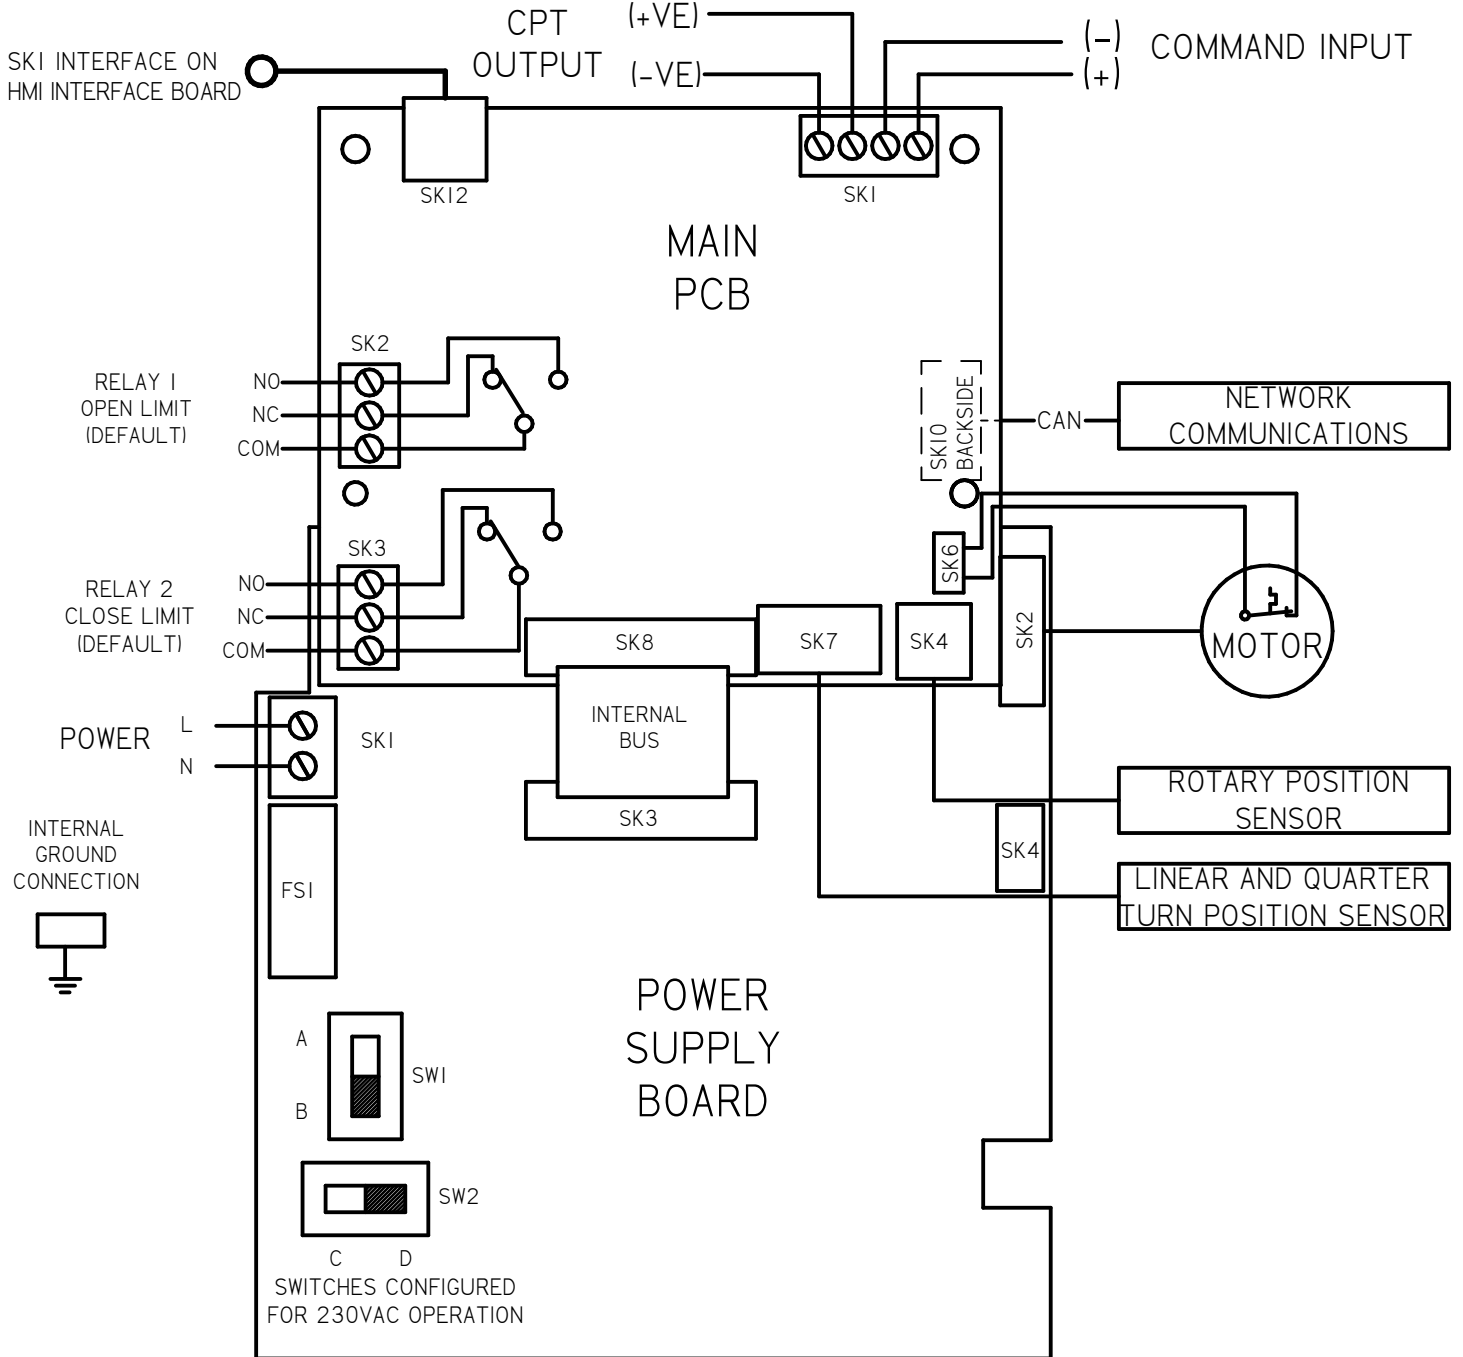

INPUT VOLTAGE	SW1	SW2
110 VAC	A	C
115 VAC	A	D
208 VAC	B	C
230 VAC	B	D

A	INITIAL RELEASE	GVM 12-29-17
REV	DESCRIPTION	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°		
SCALE: NTS		
DRAWN: ECE	PROD. DV.	PROD. ENG.
DATE: 24SEP14	DATE:	DATE:

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA


TITLE : CMA WIRING DIAGRAM		
FOR : AC POWER OPERATION LOCAL CONTROLS		
SHT 1 OF 2	A	M02-00

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

HMI INTERFACE BOARD



SKI2 INTERFACE ON
MAIN PCB BOARD

A	INITIAL RELEASE	GVM	12-29-17		
REV	DESCRIPTION	DATE			
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°			 MILWAUKEE, WISCONSIN, USA		TITLE : CMA WIRING DIAGRAM
SCALE: NTS			FOR : AC POWER OPERATION LOCAL CONTROLS		
DRAWN: ECE	PROD. DV.	PROD. ENG.	This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.		SHT 2 OF 2 A M02-00
DATE: 24SEP14	DATE:	DATE:			