

NOTES:


1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

SHT
1 OF 3

A

M02-P0

REV
A

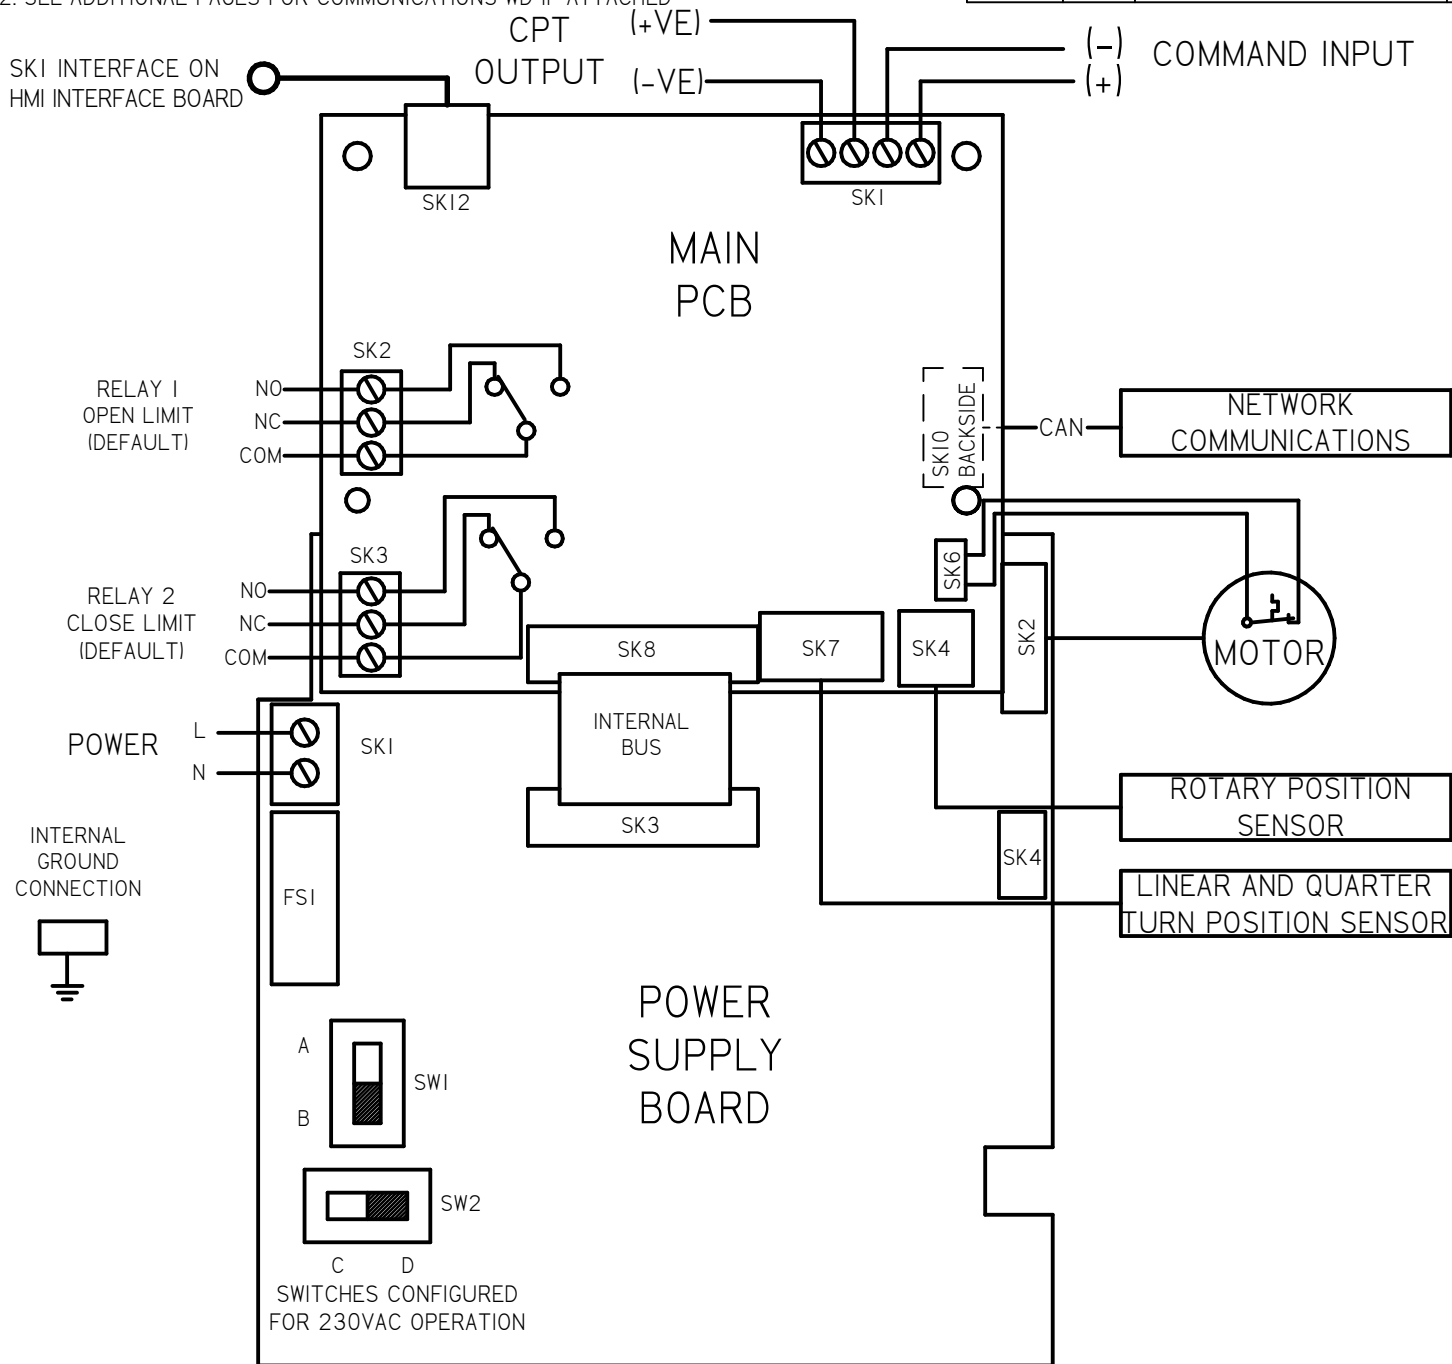

INPUT VOLTAGE	SW1	SW2
110 VAC	A	C
115 VAC	A	D
208 VAC	B	C
230 VAC	B	D

A	INITIAL RELEASE	GVM 12-29-17
REV	DESCRIPTION	DATE

TOLERANCES

UNLESS OTHERWISE SPECIFIED

.XX = ±.02 XXX = ±.005 ANGULAR ±1°

SCALE: **NTS**

DRAWN: GVM PROD. DV. PROD. ENG.

DATE: 1-12-15 DATE: DATE:

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA


This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE :
CMA WIRING DIAGRAM

FOR :
AC POWER OPERATION
LOCAL CONTROLS, PROFIBUS TERMINAL
CONNECTIONS

SHT
1 OF 3 **A** M02-P0

HMI INTERFACE BOARD

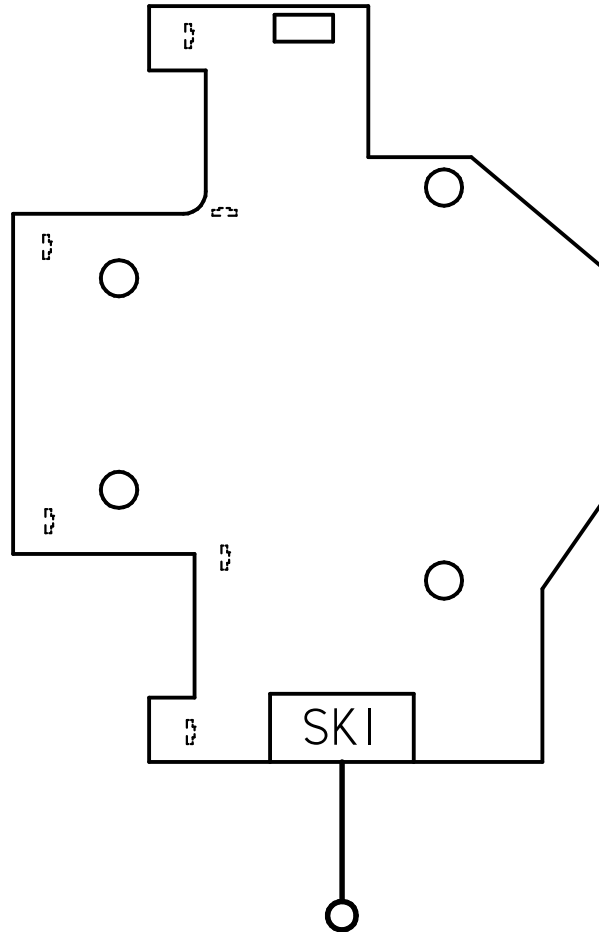

SKI2 INTERFACE ON
MAIN PCB BOARD



A	INITIAL RELEASE	GVM 12-29-17
REV	DESCRIPTION	DATE

<p>TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°</p>		
<p>SCALE: NTS</p>		
DRAWN: GVM	PROD. DV.	PROD. ENG.
DATE: 1-12-15	DATE:	DATE:

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

<p>TITLE : CMA WIRING DIAGRAM</p>		
<p>FOR : AC POWER OPERATION LOCAL CONTROLS, PROFIBUS TERMINAL CONNECTIONS</p>		
SHT 2 OF 3	A	M02-P0

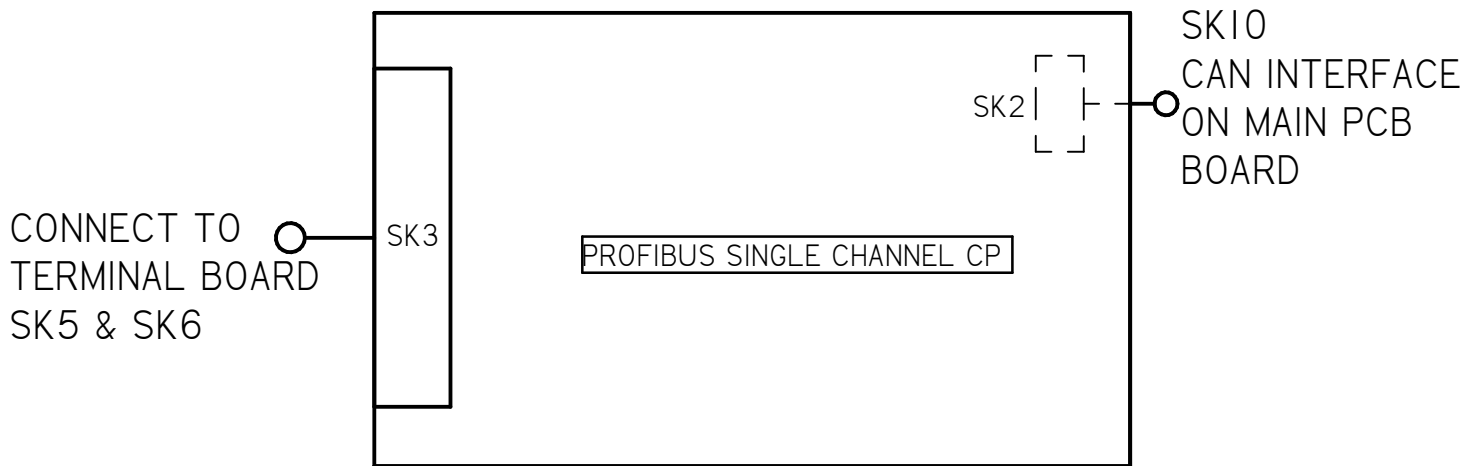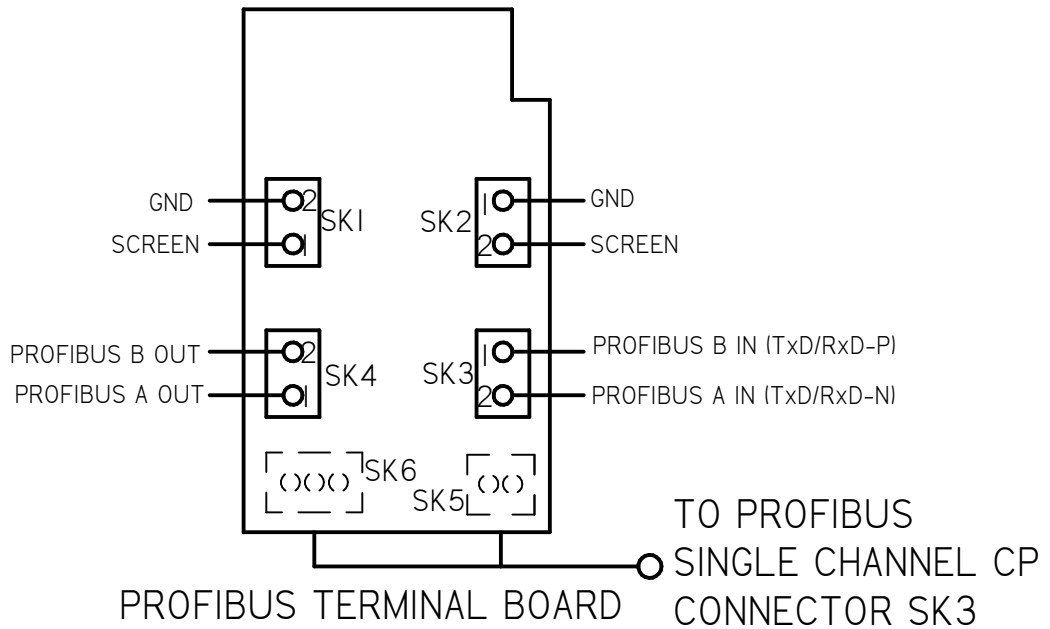

A	INITIAL RELEASE	GVM 12-29-17
REV	DESCRIPTION	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°		
SCALE: NTS		
DRAWN: GVM	PROD. DV.	PROD. ENG.
DATE: 1-12-15	DATE:	DATE:

rotork[®]
Process Controls
 MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : CMA WIRING DIAGRAM		
FOR : AC POWER OPERATION LOCAL CONTROLS, PROFIBUS TERMINAL CONNECTIONS		
SHT 3 OF 3	A	M02-P0