

NOTES:


1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

SHT
1 OF 2

A

M10-30

REV
A

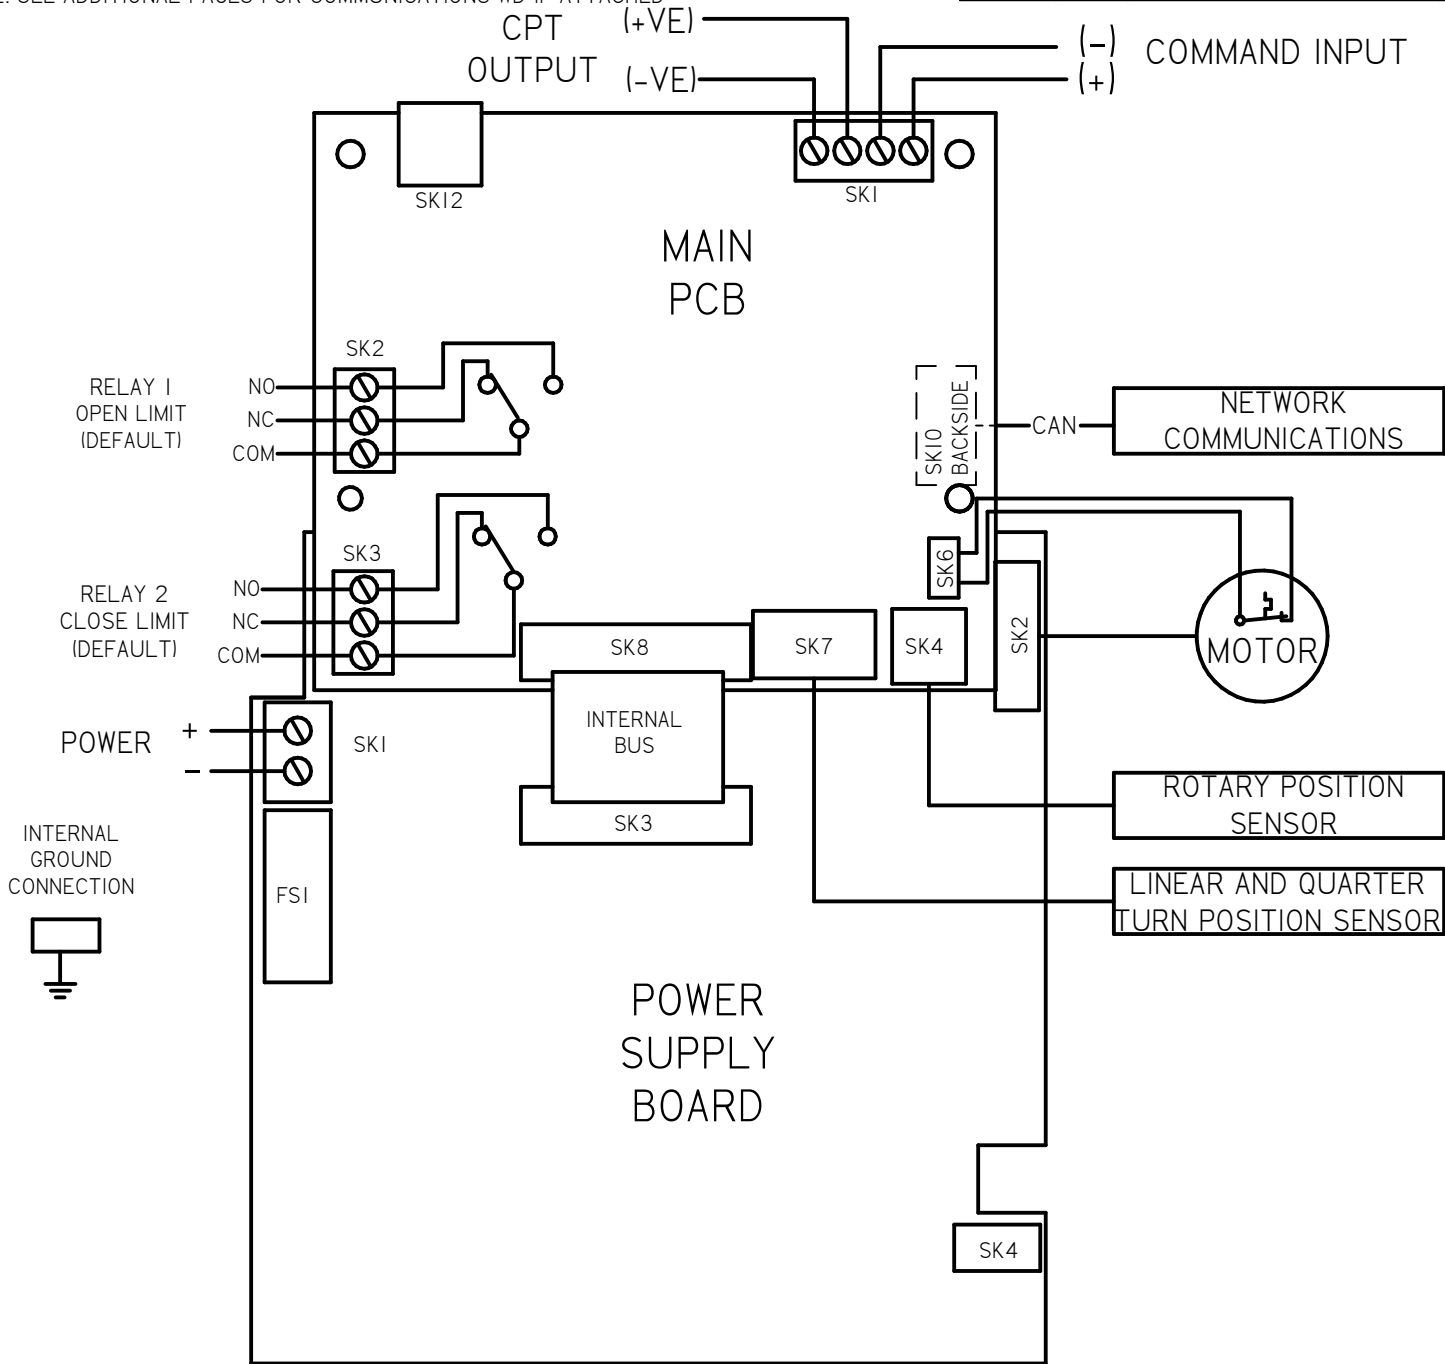



| | | |
|-----|-----------------|---------|
| A | INITIAL RELEASE | GVM |
| REV | DESCRIPTION | DATE |
| | | 6/23/15 |

| | | |
|--|-----------|--------------------------|
| <p>TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°</p> | | |
| <p>SCALE: NTS</p> | | |
| DRAWN: GVM | PROD. DV. | PROD. ENG. CHK |
| DATE: 6/23/15 | DATE: | DATE: 6/23/15 |

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA


This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

| | | |
|--|----------|---------------|
| <p>TITLE : CMA WIRING DIAGRAM</p> | | |
| <p>FOR : DC POWER OPERATION FOLO/CPT (CURRENT POSITION TRANSMITTER) TERMINAL CONNECTIONS</p> | | |
| SHT 1 OF 2 | A | M10-30 |

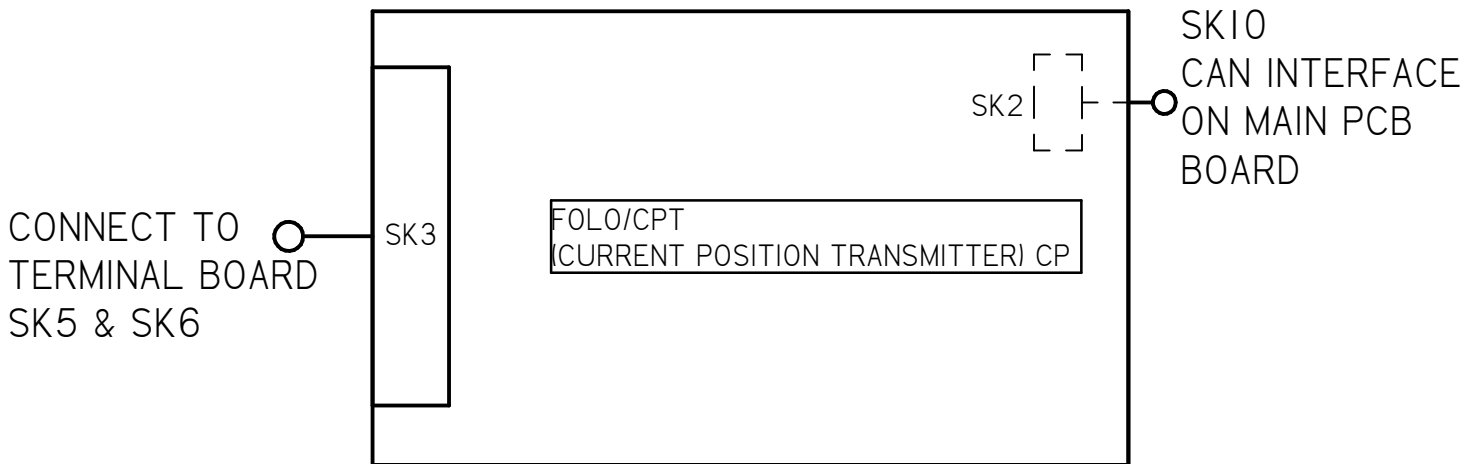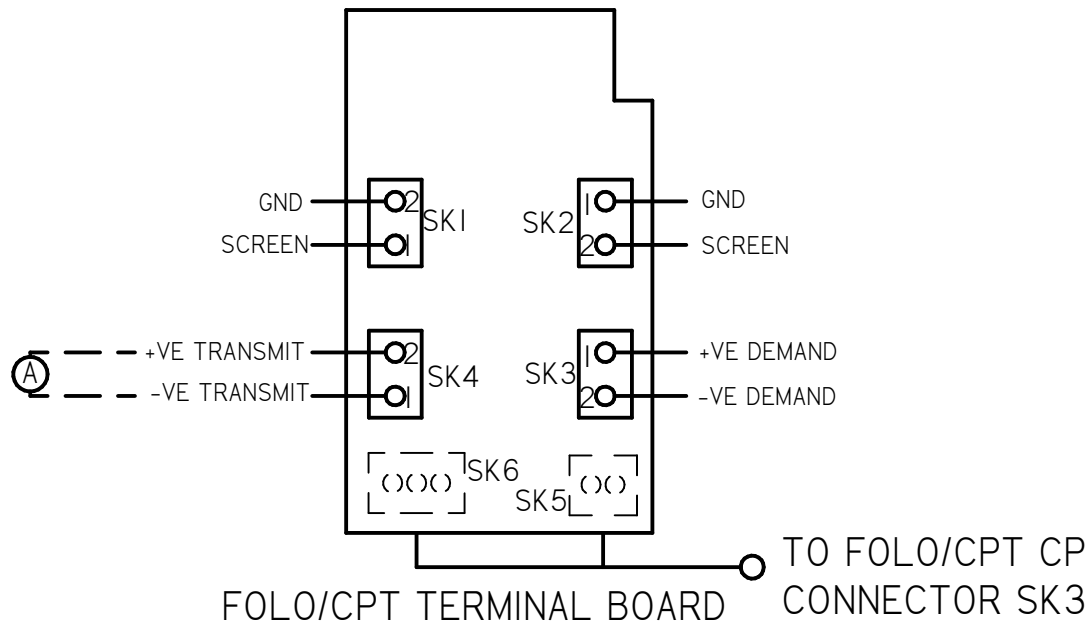

| | | |
|------------|--------------------|----------------|
| | | |
| A | INITIAL RELEASE | GVM 6/23/15 |
| REV | DESCRIPTION | DATE |

| | | |
|---|-----------|--------------------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1° | | |
| SCALE: NTS | | |
| DRAWN: GVM | PROD. DV. | PROD. ENG. CHK |
| DATE: 6/23/15 | DATE: | DATE: 6/23/15 |


Process Controls
 MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

| | | |
|--|----------|---------------|
| TITLE : CMA WIRING DIAGRAM | | |
| FOR : DC POWER OPERATION FOLO/CPT (CURRENT POSITION TRANSMITTER) TERMINAL CONNECTIONS | | |
| SHT 2 OF 2 | A | M10-30 |