

NOTES:


1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS W/D IF ATTACHED

SHT
1 OF 2

A

M00-30

REV
A

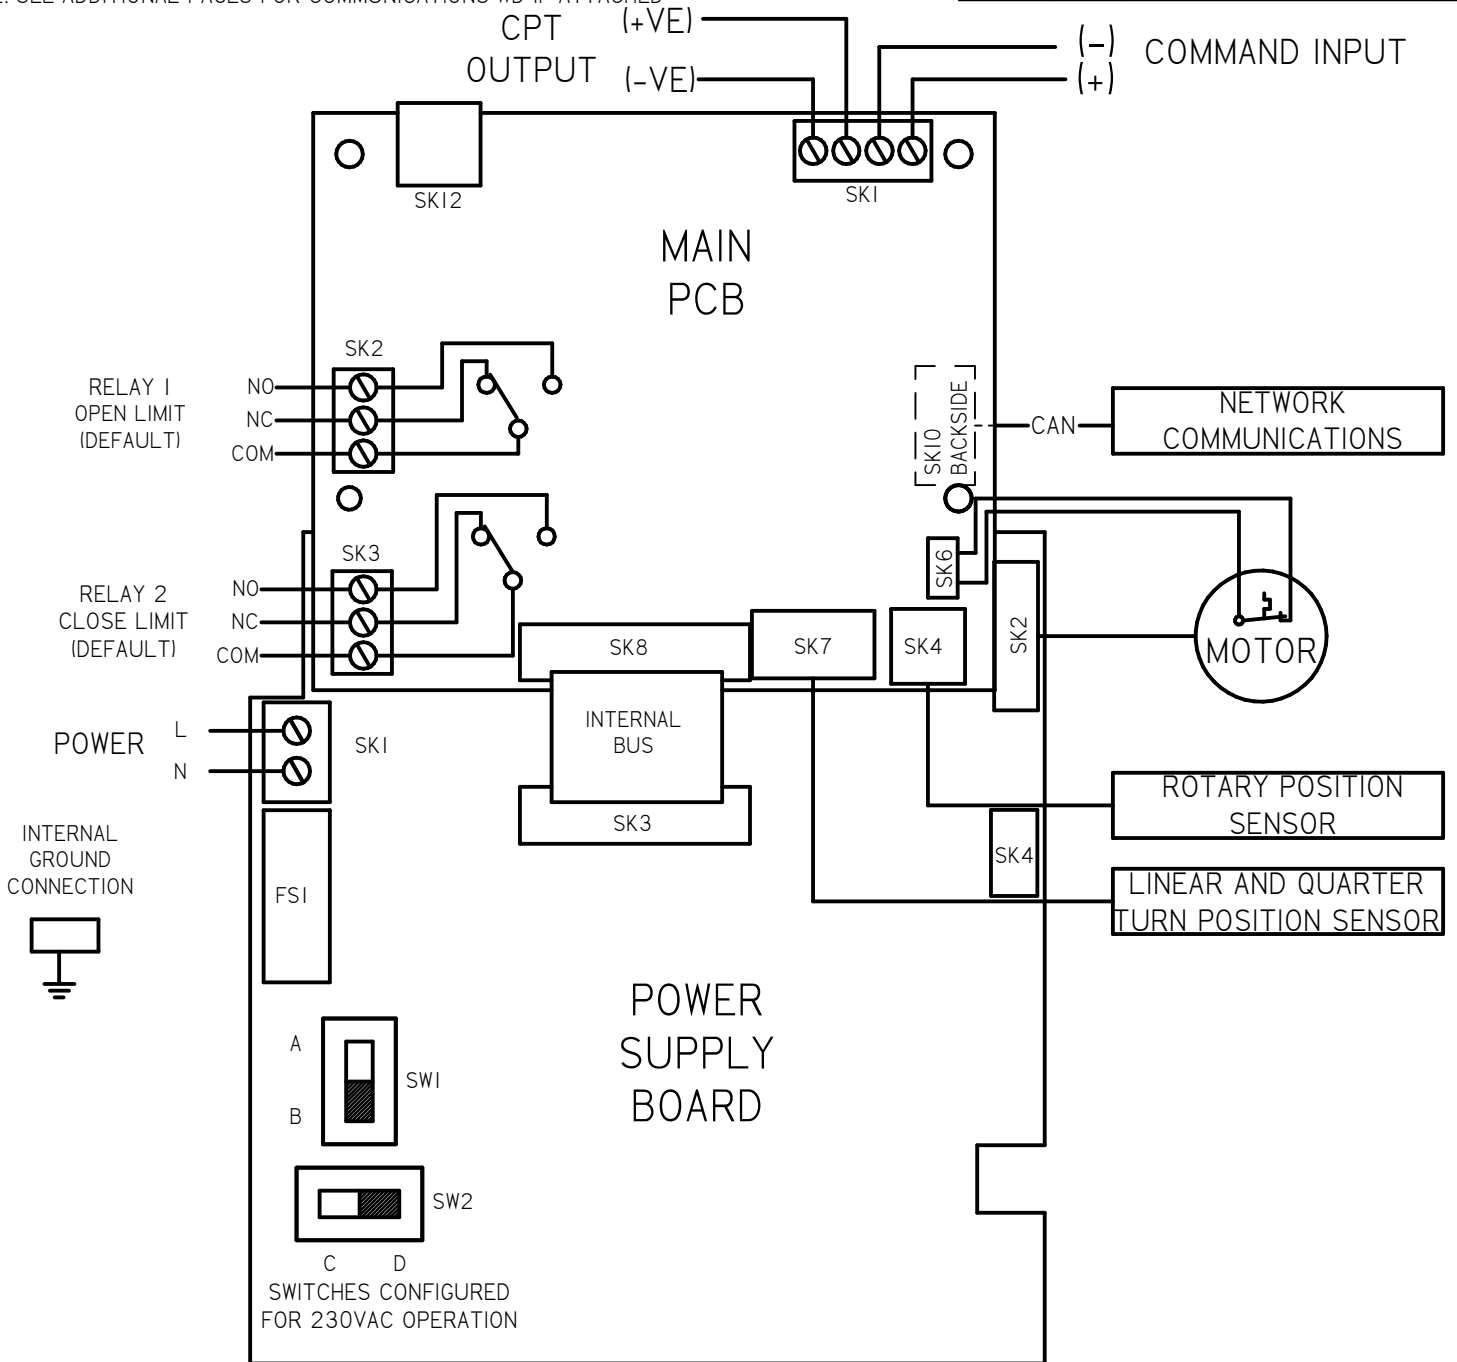

A	INITIAL RELEASE	GVM 6/23/15
REV	DESCRIPTION	DATE

<p>TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°</p>		
<p>SCALE: NTS</p>		
DRAWN: GVM	PROD. DV.	PROD. ENG. CHK
DATE: 6/23/15	DATE:	DATE: 6/23/15

rotork[®]
Process Controls
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.



TITLE :
**CMA
WIRING DIAGRAM**

FOR :
AC POWER OPERATION
FOLO/CPT (CURRENT POSITION TRANSMITTER)
TERMINAL CONNECTIONS

SHT
1 OF 2

A

M00-30

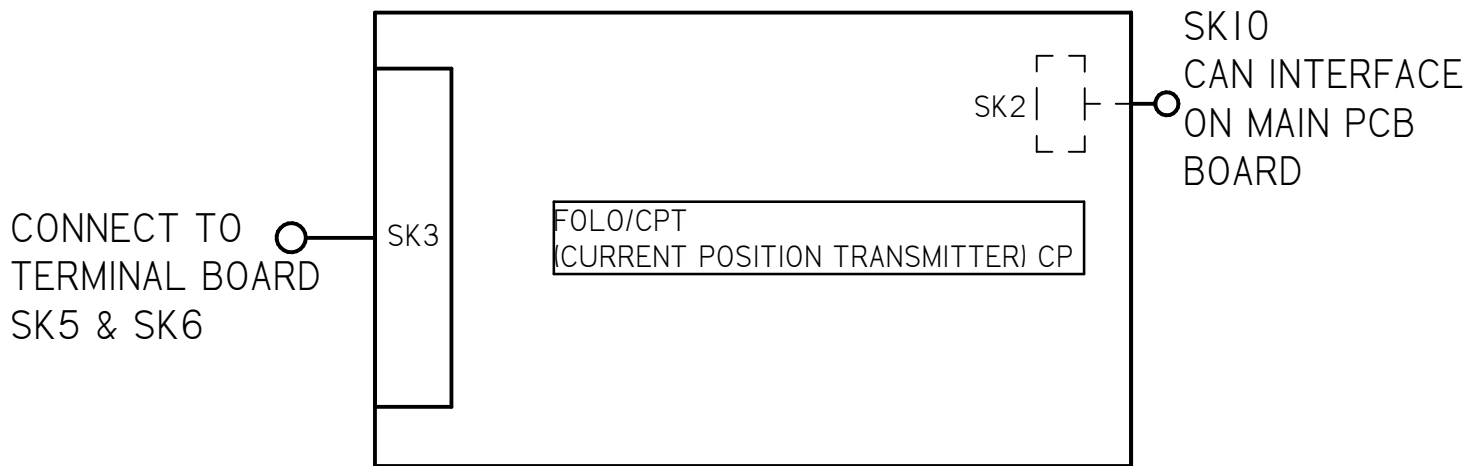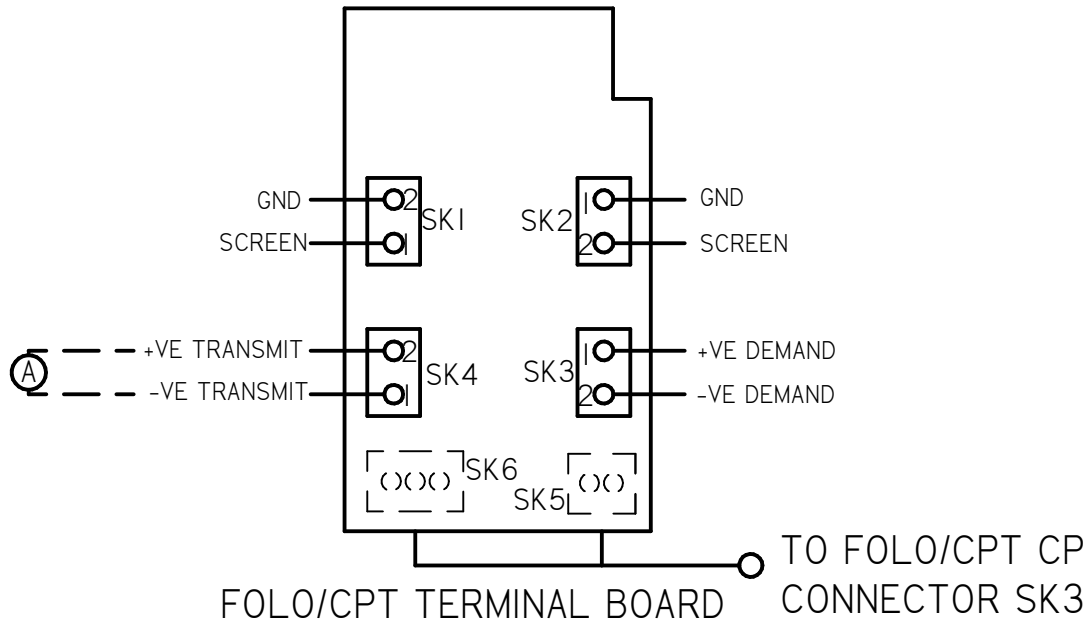

A	INITIAL RELEASE	GVM 6/23/15
REV	DESCRIPTION	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°		
SCALE: NTS		
DRAWN: GVM	PROD. DV.	PROD. ENG. CHK
DATE: 6/23/15	DATE:	DATE: 6/23/15

rotork[®]
Process Controls
 MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : CMA WIRING DIAGRAM		
FOR : AC POWER OPERATION FOLO/CPT (CURRENT POSITION TRANSMITTER) TERMINAL CONNECTIONS		
SHT 2 OF 2	A	M00-30