

CUSTOMER CONNECTIONS

- SK12 — COM RELAY 2
- SK11 — NC CLOSED
- SK10 — NO LIMIT
- SK9 — COM RELAY 1
- SK8 — NC OPEN
- SK7 — NO LIMIT
- SK6 — (-VE) CPT
- SK5 — (+VE) CPT
- SK4 — (-) COMMAND
- SK3 — (+) COMMAND

- SK2 — NEUTRAL
- SK1 — LI POWER

A	INITIAL RELEASE	ECE
REV	DESCRIPTION	DATE
		12APR18


NOTES:
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°		
SCALE: NTS		
DRAWN: ECE	PROD. DV.	PROD. ENG.
DATE: 12APR18	DATE:	DATE:

rotork
Controls
MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : CMA 1500 & 3000 WIRING DIAGRAM	
FOR : AC POWER OPERATION LOCAL CONTROLS, PROFIBUS	
SHT 1 OF 2	M32-P0

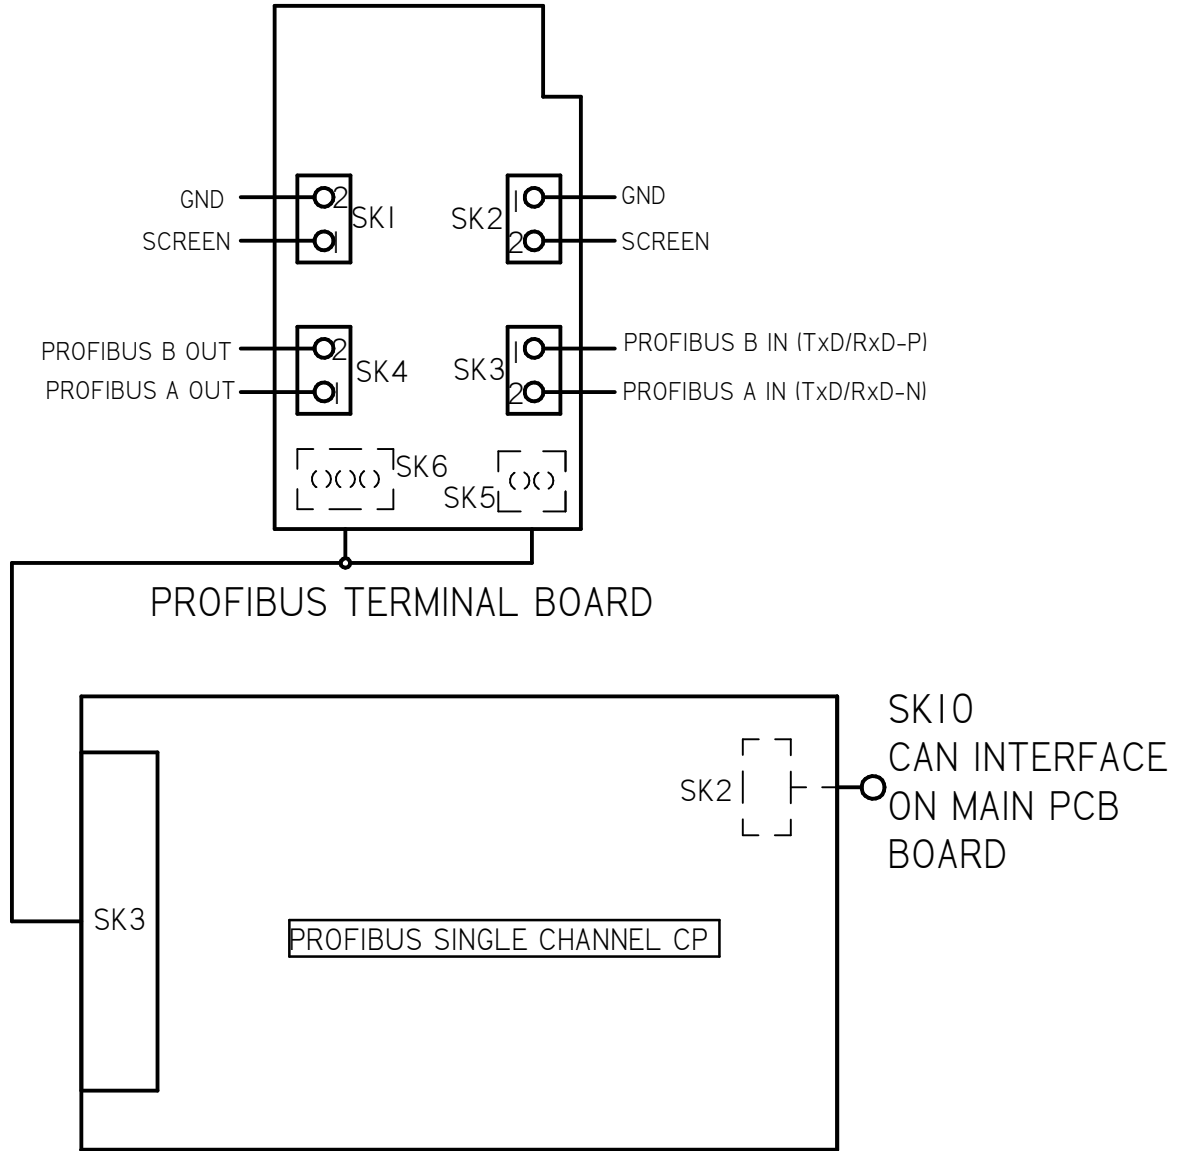

A	INITIAL RELEASE	ECE	12APR18	NOTES: 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX) 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED	
REV	DESCRIPTION	DATE			
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°			 MILWAUKEE, WISCONSIN, USA		TITLE : CMA 1500 & 3000 WIRING DIAGRAM
SCALE: NTS					FOR : AC POWER OPERATION LOCAL CONTROLS, PROFIBUS
DRAWN:	PROD. DV.	PROD. ENG.	This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.		SHT 2OF 2
ECE					M32-P0
DATE:	DATE:	DATE:	12APR18		