

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE

NOTES:  
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAXI)  
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED


<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°		
SCALE: <b>NTS</b>		
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.
DATE: <b>12APR18</b>	DATE:	DATE:

**rotork**<sup>®</sup>  
Controls

MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : <b>CMA 1500 &amp; 3000 WIRING DIAGRAM</b>	
FOR : <b>24V DC POWER OPERATION LOCAL CONTROLS, UPS</b>	
SHT 1 OF 2	<b>M42-0S</b>

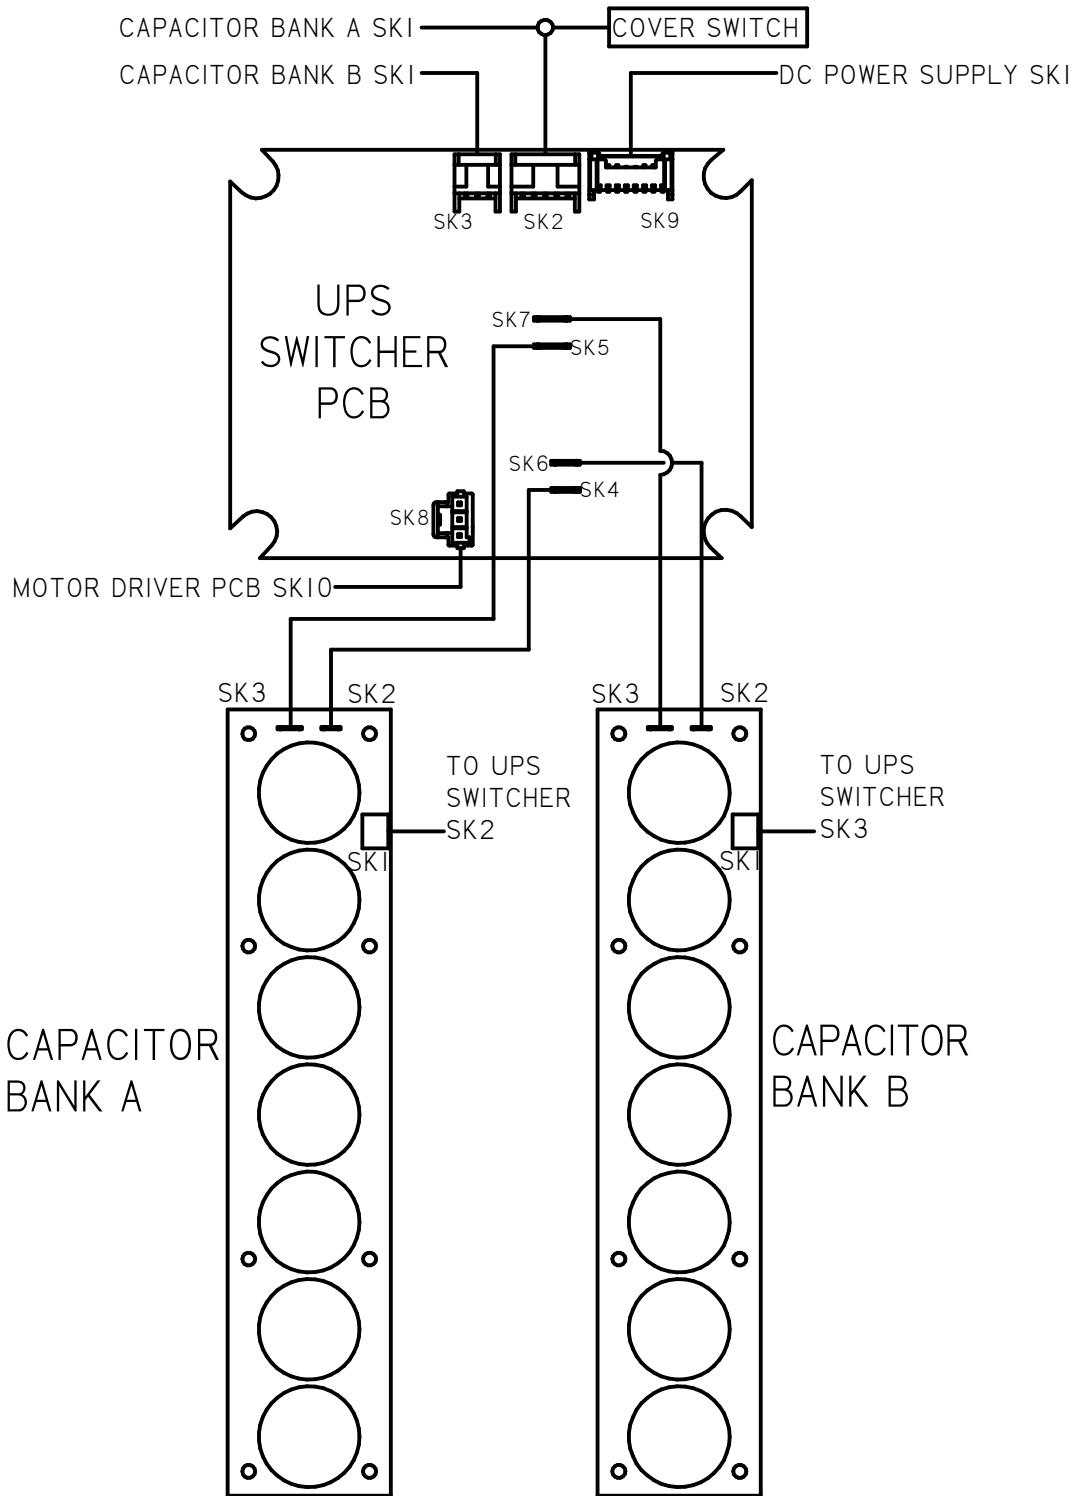

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE
<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°		 MILWAUKEE, WISCONSIN, USA
SCALE: NTS		
DRAWN:	PROD. DV.	PROD. ENG.
ECE		
DATE:	DATE:	DATE:
12APR18		
TITLE : <b>CMA 1500 &amp; 3000          WIRING DIAGRAM</b>		FOR : 24V DC POWER OPERATION LOCAL CONTROLS, UPS
SHT 2 OF 2		
		<b>M42-0S</b>
This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.		