

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE

NOTES:
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED


TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°		
SCALE: NTS		
DRAWN: ECE	PROD. DV.	PROD. ENG.
DATE: 12APR18	DATE:	DATE:


rotork
Controls

MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : CMA 1500 & 3000 WIRING DIAGRAM	
FOR : 24V DC POWER OPERATION LOCAL CONTROLS, FOUNDATION FIELDBUS	
SHT 1 OF 2	M42-F0

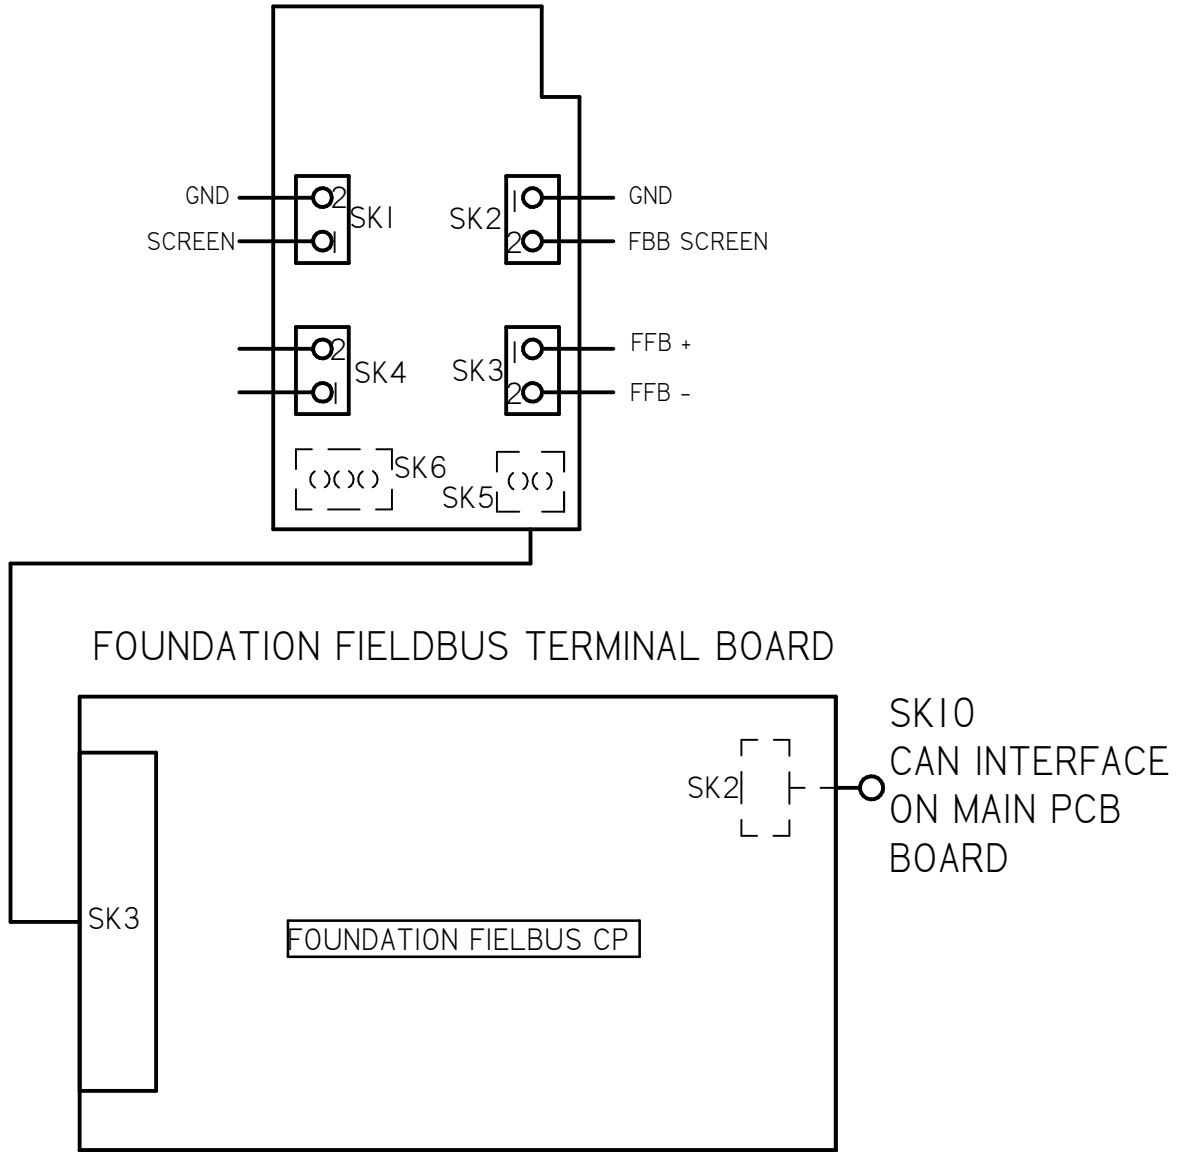

A	INITIAL RELEASE	ECE	12APR18	NOTES: 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX) 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED	
REV	DESCRIPTION	DATE			
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.02 XXX = ±.005 ANGULAR ±1°			 MILWAUKEE, WISCONSIN, USA		TITLE : CMA 1500 & 3000 WIRING DIAGRAM
SCALE: NTS					FOR : 24V DC POWER OPERATION LOCAL CONTROLS, FOUNDATION FIELDBUS
DRAWN:	PROD. DV.	PROD. ENG.			
ECE					
DATE:	DATE:	DATE:			
12APR18				SHT 2OF 2	M42-F0
			This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.		