

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE

NOTES:  
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)  
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED


<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°		
SCALE: <b>NTS</b>		
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.
DATE: <b>12APR18</b>	DATE:	DATE:

**rotork**  
Controls

MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : <b>CMA 1500 &amp; 3000 WIRING DIAGRAM</b>	
FOR : <b>12V DC POWER OPERATION LOCAL CONTROLS, FOUNDATION FIELDBUS</b>	
SHT 1 OF 2	<b>M52-F0</b>

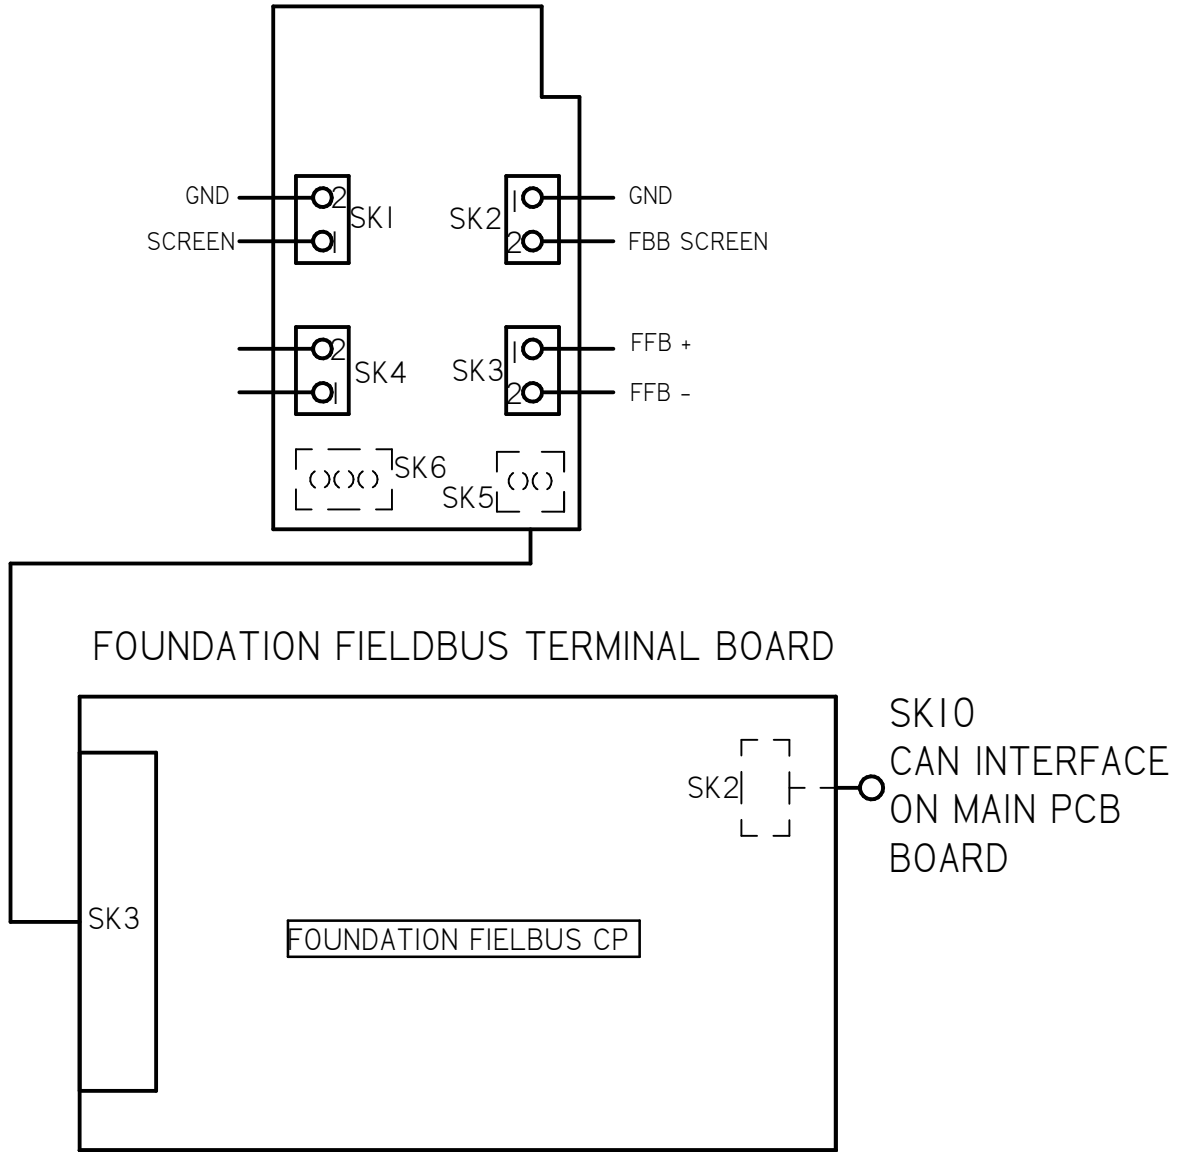

			NOTES: 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX) 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED	
A	INITIAL RELEASE	ECE 12APR18		
REV	DESCRIPTION	DATE		
<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°			<b>rotork</b> <b>Controls</b> MILWAUKEE, WISCONSIN, USA	
SCALE: <b>NTS</b>				
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.	FOR : <b>12V DC POWER OPERATION          LOCAL CONTROLS, FOUNDATION FIELDBUS</b>	
DATE: <b>12APR18</b>	DATE:	DATE:	SHT 2OF 2	<b>M52-F0</b>
			This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.	