
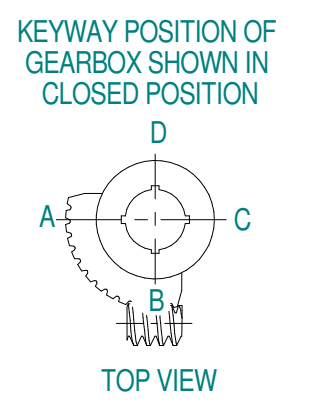


INPUT FLANGE DETAILS				MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)				STEM ACCEPTANCE IN ACCORDANCE TO STANDARD					
INPUT FLANGE	FLANGE O/DIA.	HOLE DETAILS (OFF CENTRES)	KEY DETAILS	ISO 5211 / MSS SP-101 MOUNTING OPTION	HOLE DETAILS (OFF CENTRES)	MAX OUTSIDE DIA. INCLUDING DRILLED HOLES	MIN INSIDE DIA. INCLUDING DRILLED HOLES	BORE MACHINED IN	STANDARD	MIN BORE	RECT. KEY MAX BORE	RECT. KEY SIZE	SQ BORE MAX
-	-	-	-	F25 (FA25)	8x M16* x 24 DEEP ON A Ø254P.C. (8x 5/8"UNC x 0.94" DEEP ON A 10"P.C.)	Ø395 (Ø15.55")	Ø204 (Ø8.03")	QUADRANT	DIN 6885	Ø65	Ø160	40 x 22	□ 115
-	-	-	-	F30 (FA30)	8x M20* x 33 DEEP ON A Ø298P.C. (8x 3/4"UNC x 0.1.3" DEEP ON A 11.75"P.C.)				BS46	Ø2.56"	Ø6.29"	1-3/4 x 1-1/4	□ 4.52"
-	-	-	-	F35 (FA35)	8x M30* x 15 DEEP ON A Ø356P.C. (8x 1"UNC x 1.38" DEEP ON A 14"P.C.)								

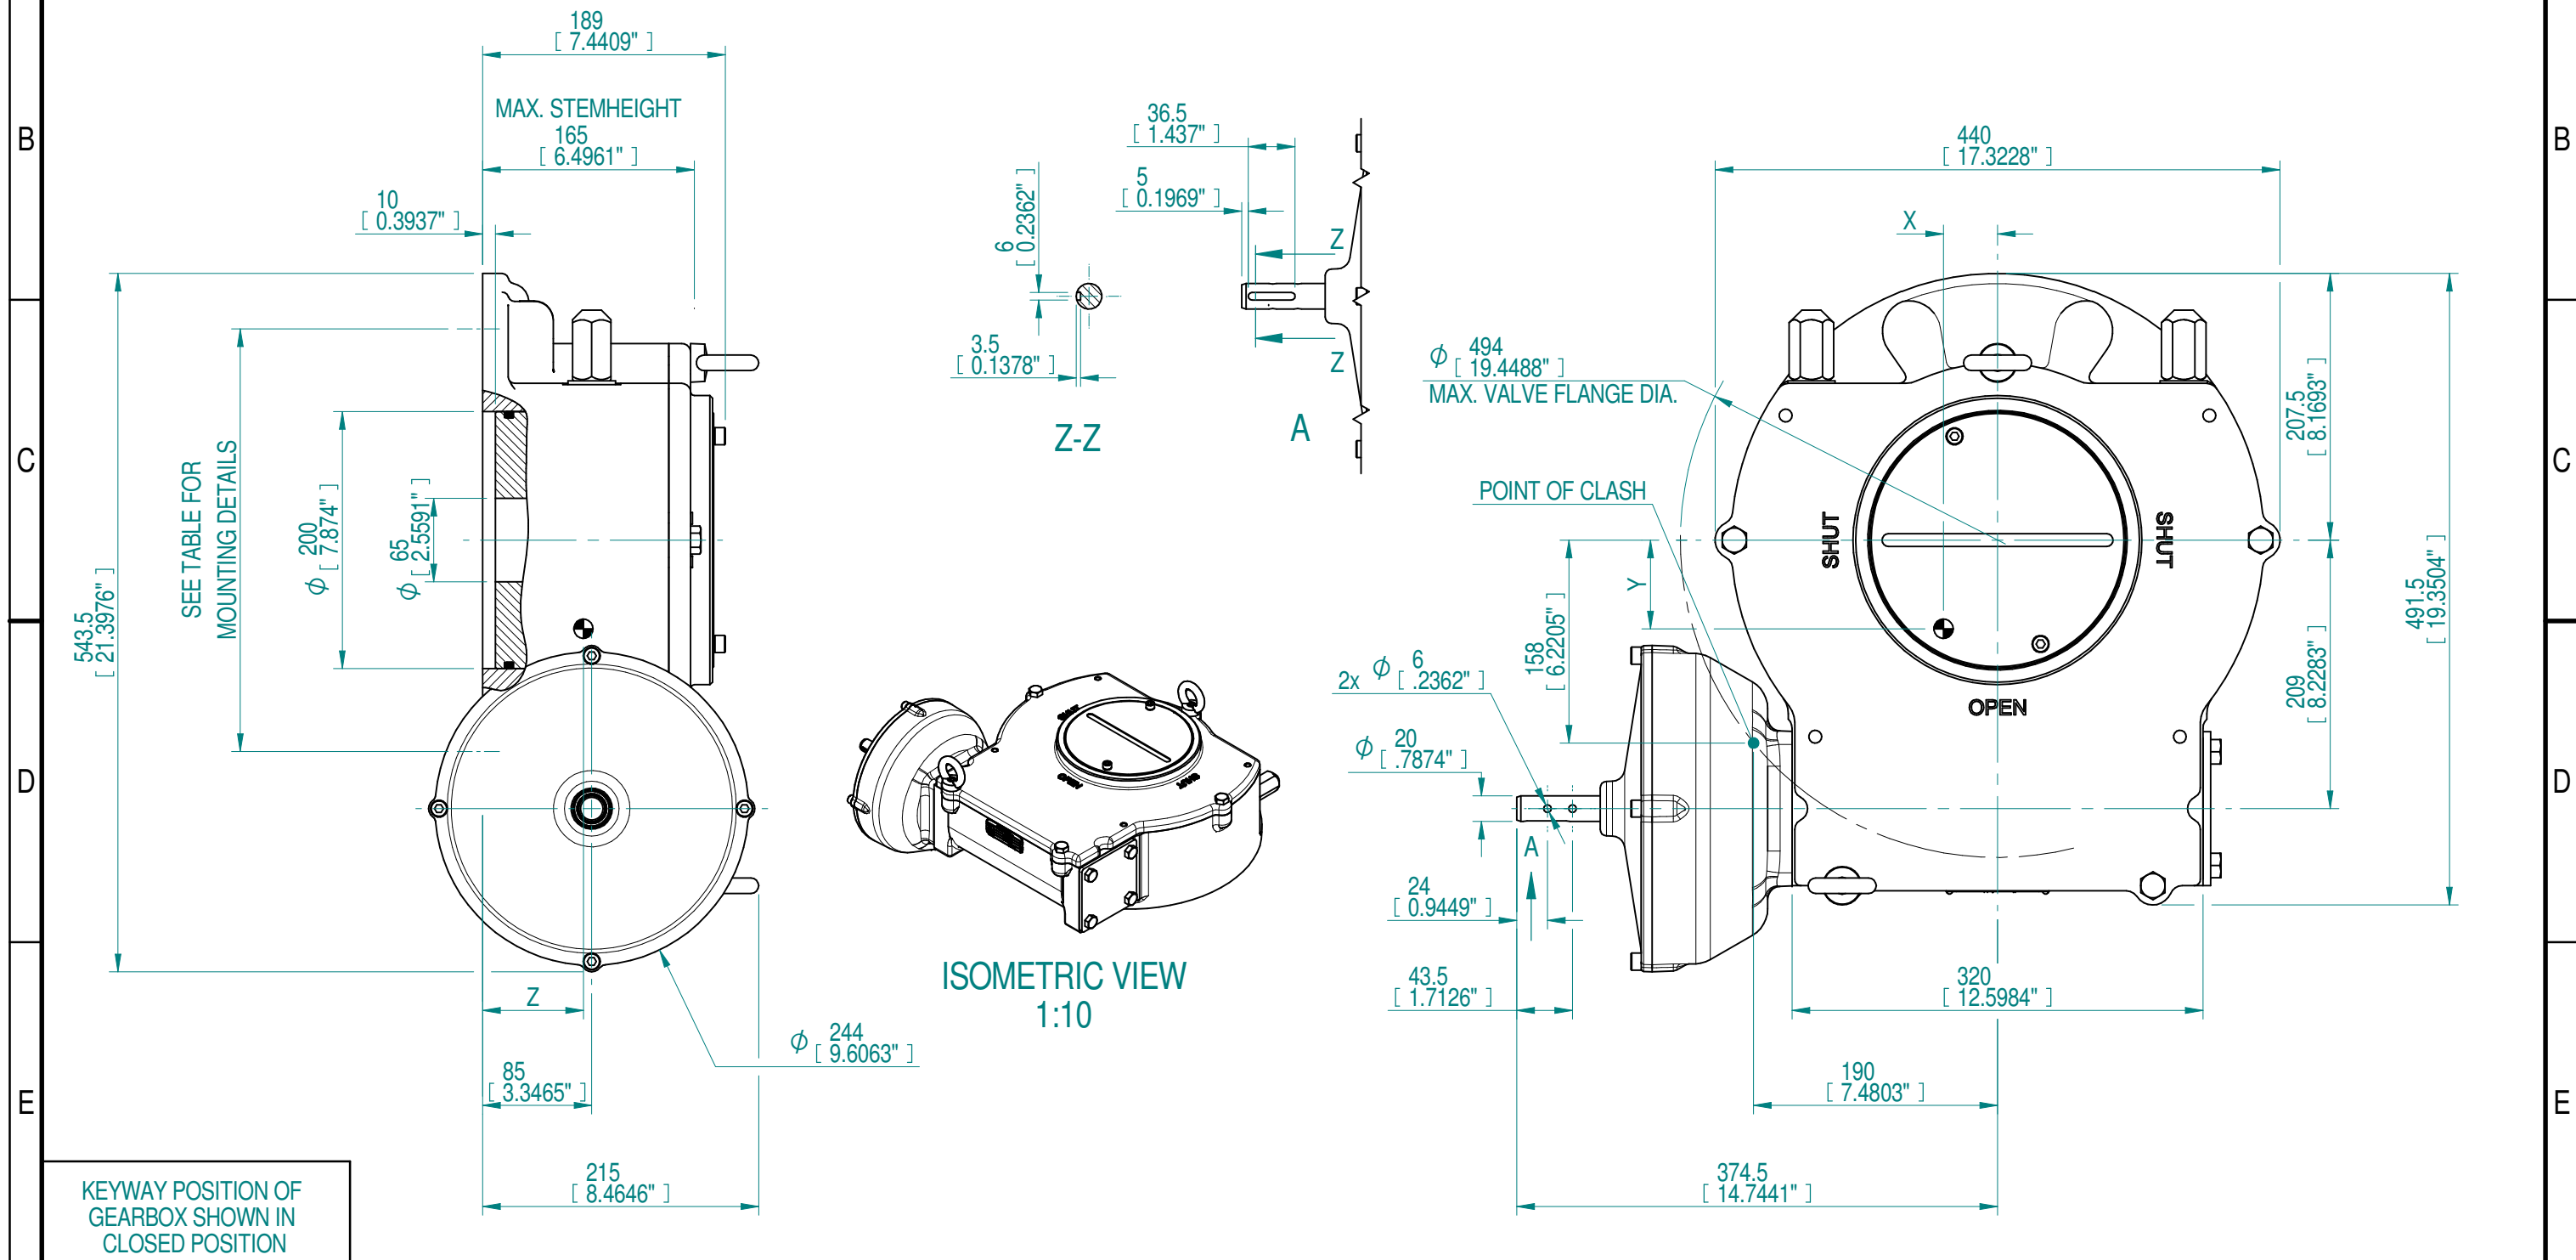

NOTES:  
 1. \* THREAD DEPTH DOES NOT MATCH ISO STANDARD  
 2. CENTRE OF GRAVITY POSITION IS INDICATIVE FOR STANDARD BUILD WHEN IN POSITION SHOWN

DESCRIPTION	TORQUE	CENTRE OF GRAVITY
RATIO	MAX OUTPUT	X
729 : 1	26000 Nm	69
182.25	230120 lbf.in.	78.5
210 ± 15%	124 Nm	3.09"
M.A.	MAX INPUT	Z
157.4 kg	36.1	43.5
346.3 lbs.	1.42"	1.7126"
WEIGHT EXCL. HW		

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT [www.rotork.com](http://www.rotork.com)

**rotork** Gears  
 LOSSER - THE NETHERLANDS  
[www.rotork.com](http://www.rotork.com)

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2018

Document Type	GAD	Title	GEARBOX A200SS-PR10 RIGHT HANDED WITHOUT BORE AND PC D	
Created	robbin.goosen	17-5-2018	Drawing Number	PUB01727
Checked	Henk Hoff	23-5-2018	Iss.	01
Approved			Sheet	1 of 2
			Size	A3

Rev.05