

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE


NOTES:  
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)  
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED

<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°		
SCALE: NTS		
DRAWN: ECE	PROD. DV.	PROD. ENG.
DATE: 12APR18	DATE:	DATE:

  
 MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : <b>CMA 1500 &amp; 3000          WIRING DIAGRAM</b>	
FOR : AC POWER OPERATION LOCAL CONTROLS, FOUNDATION FIELDBUS, RIRO	
SHT 1 OF 3	M32-FD

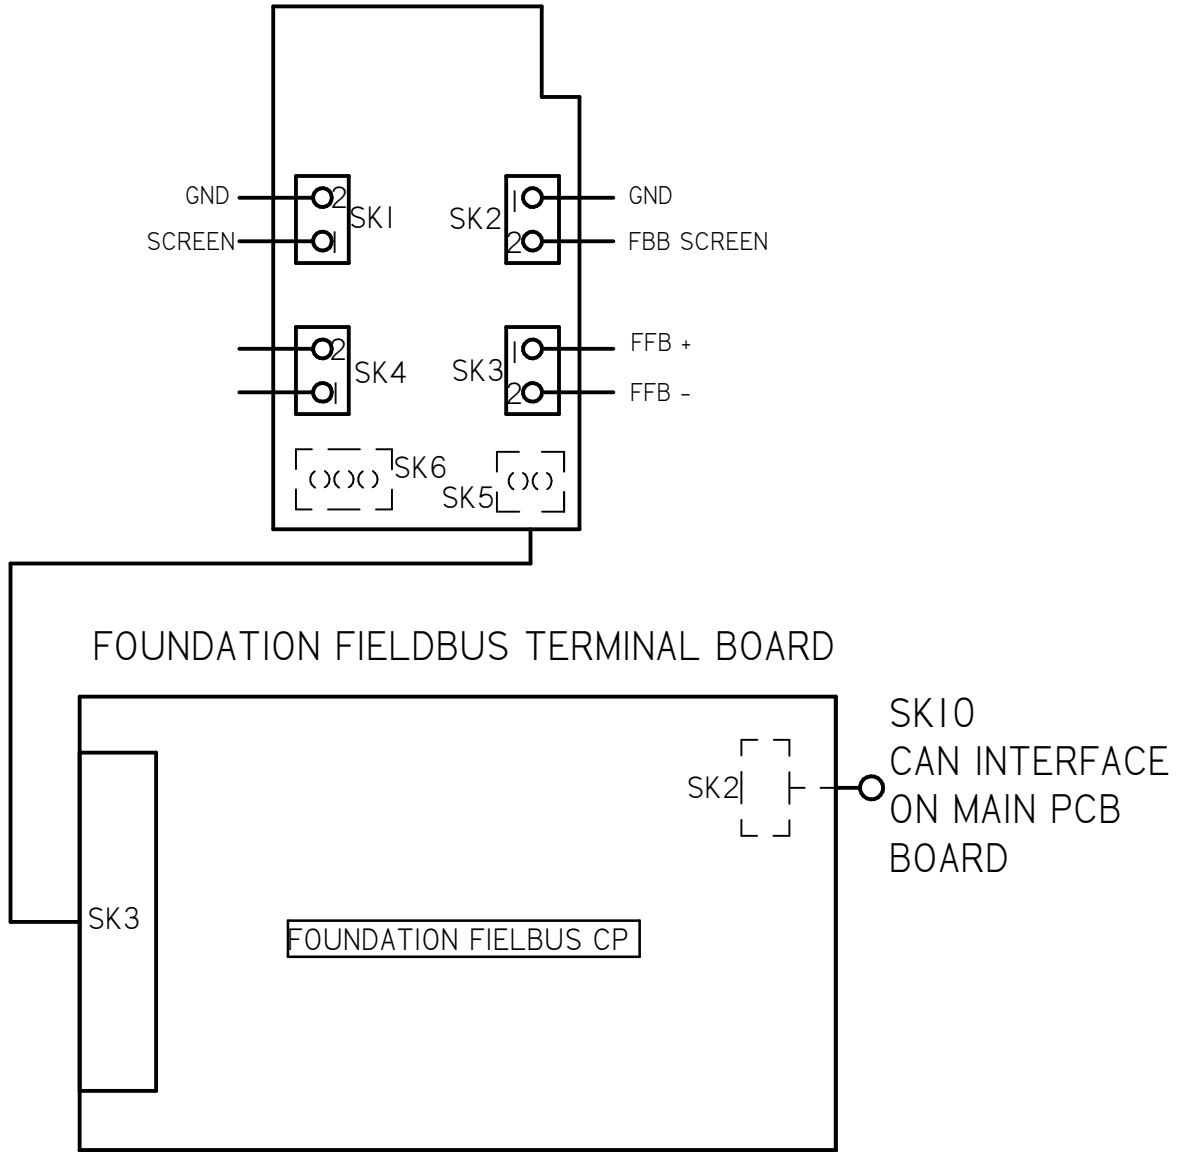


A	INITIAL RELEASE	ECE 12APR18	NOTES: 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX) 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED	
REV	DESCRIPTION	DATE		
<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°			<b>rotork</b> <b>Controls</b> MILWAUKEE, WISCONSIN, USA	
SCALE: <b>NTS</b>				TITLE : <b>CMA 1500 &amp; 3000          WIRING DIAGRAM</b>
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.		FOR : <b>AC POWER OPERATION          LOCAL CONTROLS, FOUNDATION FIELDBUS, RIRO</b>
DATE: <b>12APR18</b>	DATE:	DATE:	This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.	
		SHT 2 OF 3	<b>M32-FD</b>	

RIRO REMOTE INPUTS - DEFAULT SETTINGS		
INPUT	FUNCTION	CONTACT FORM
I/P1	CLOSE COMMAND	NORMALLY OPEN
I/P2	STOP/MAINTAIN	NORMALLY OPEN
I/P3	OPEN COMMAND	NORMALLY OPEN
I/P4	ESD	NORMALLY OPEN

REFER TO PUB094-004 FOR FULL DETAILS

RIRO RELAY OUTPUTS- DEFAULT SETTINGS		
INPUT	FUNCTION	CONTACT FORM
RELAY 5	NONE	ENERGIZE ON CONDITION
RELAY 6	NONE	ENERGIZE ON CONDITION
RELAY 7	NONE	ENERGIZE ON CONDITION
RELAY 8	NONE	ENERGIZE ON CONDITION

REFER TO PUB094-004 FOR FULL DETAILS

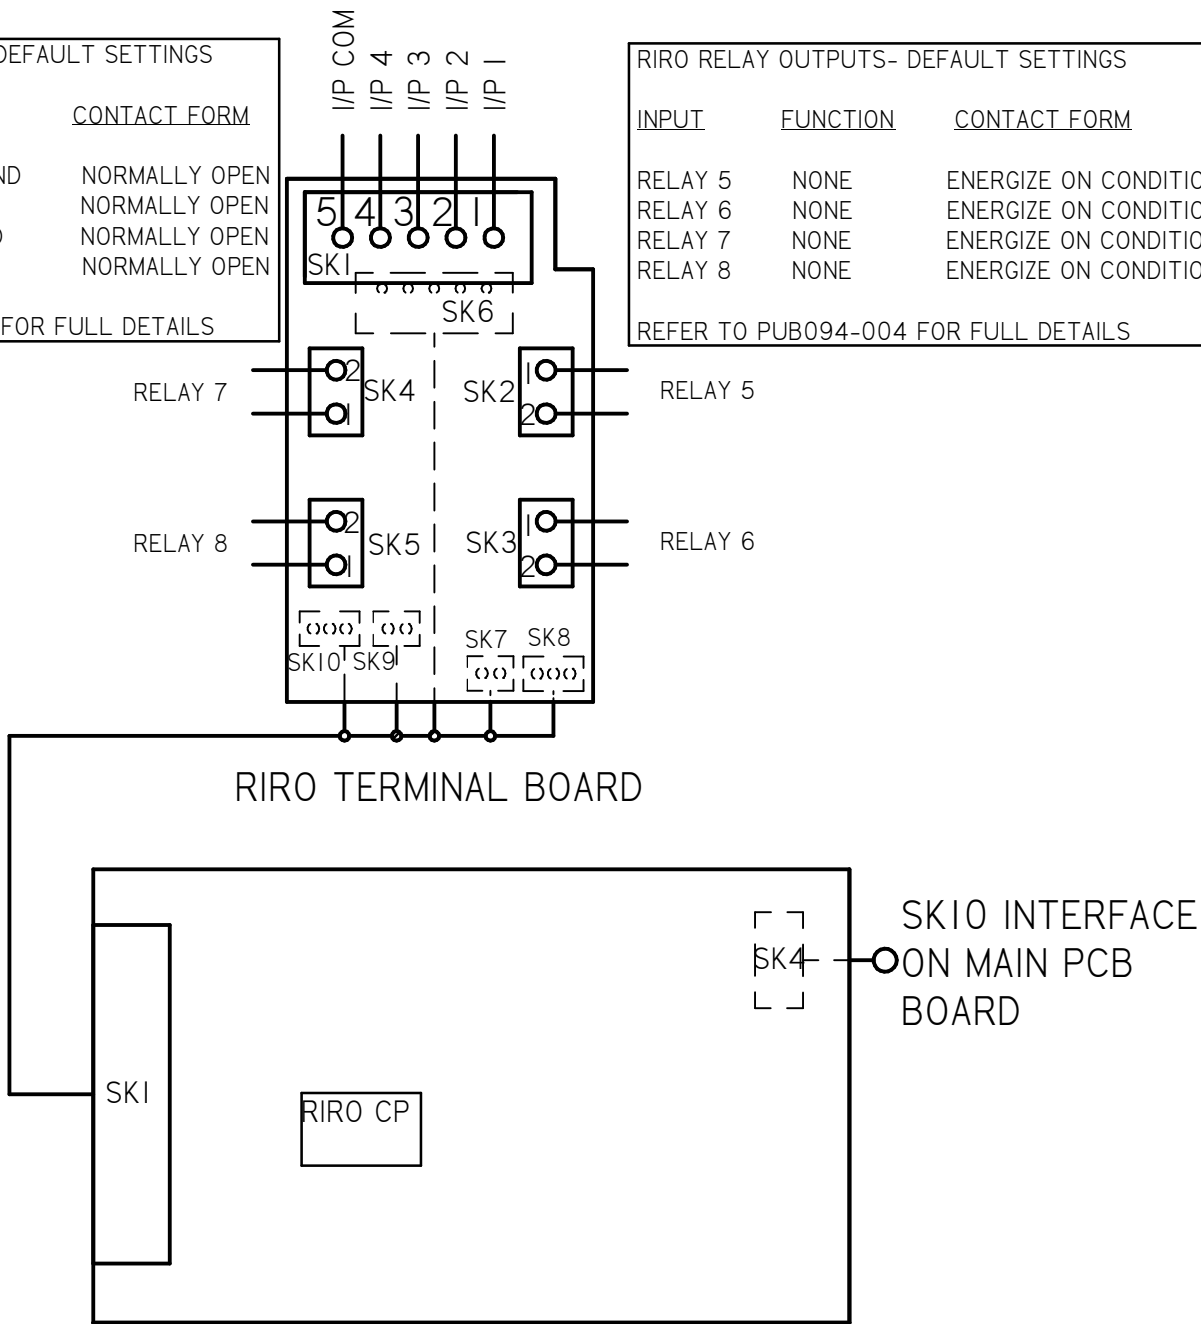

A	INITIAL RELEASE	ECE 12APR18
REV	DESCRIPTION	DATE

NOTES:  
 1. 4-20 mA OUTPUT, 24VDC NOMINAL, (18-30 VDC MAX)  
 2. SEE ADDITIONAL PAGES FOR COMMUNICATIONS WD IF ATTACHED

<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED .XX = ±.02    XXX = ±.005    ANGULAR ±1°		
SCALE: <b>NTS</b>		
DRAWN: <b>ECE</b>	PROD. DV.	PROD. ENG.
DATE: <b>12APR18</b>	DATE:	DATE:

**rotork**  
Controls

MILWAUKEE, WISCONSIN, USA

This print is the property of Rotork Process Controls and is loaned in confidence subject to return. All rights to design or invention are reserved.

TITLE : <b>CMA 1500 &amp; 3000 WIRING DIAGRAM</b>	
FOR : <b>AC POWER OPERATION LOCAL CONTROLS, FOUNDATION FIELDBUS, RIRO</b>	
SHT 3 OF 3	<b>M32-FD</b>